State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

GLO RECORD: SET AN IRON POST, 3 FT. LONG, 3 INS. DIAM., 2 1/2 FT. IN THE GROUND, FOR CORNER OF SECS. 7, 12, 13, AND 18, AND MARK ON THE BRASS CAP ON THE POST.

MONUMENT FOUND: FOUND 3" PIPE WITH 3 1/4" BRASS CAP STAMPED U.S. GLO 1911 AS SHOWN BELOW. MONUMENT WAS RECOVERED FLUSH WITH GROUND SURFACE.

MONUMENT SET: NONE.


REFERENCES: SET REFERENCE TIES AS SHOWN IN SKETCH BELOW.

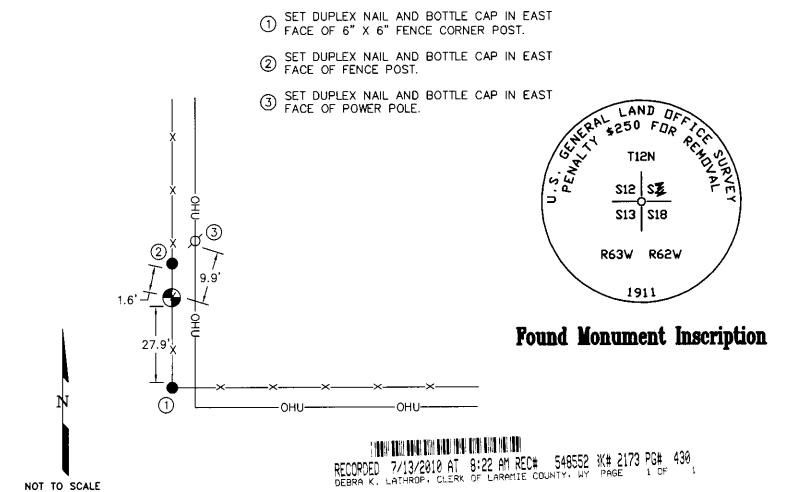

Date of Field Work: 6/7/10

SBRPEPLS/PLSW: March 1994; PLSW January 1998

∠ 13 Office Reference: 2010022 (LAT40)

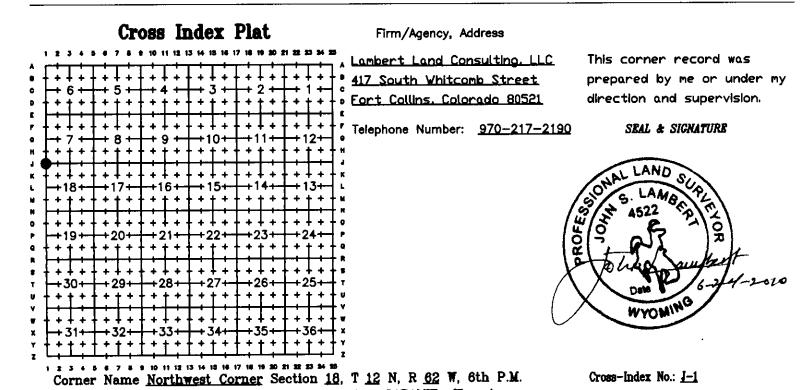

County: LARAMIE Wyoming