

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)


LOCATION
 $\frac{1}{4}$
 S.13 S.18
 T.12N.
 R.66W., R.65W.
 6th P.M.

Found 4" x 4" x 10" Granite stone, in place, with " $\frac{1}{4}$ ".
 G.L.O. record - Boulder stone, 9 x 8 x 7

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
 TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Set a $1\frac{1}{2}$ " dia. x 30" long iron pipe with brass cap.
 Accessories: Raised small rock mound south of corner monument.
 Left stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

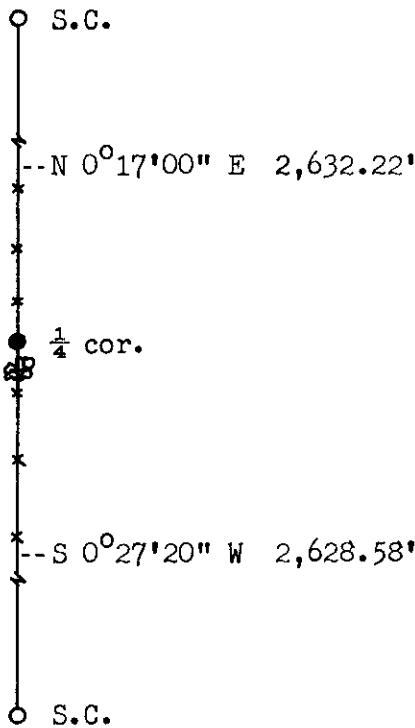

Basis of Bearing - By solar obs.
 Distances by electronic means.



Brass cap set 6" above ground.
 Brass cap stamped:
 R.66W. T.12N. R.65W.
 $\frac{1}{4}$
 S.13 S.18
 LS 519 1973

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson Wyoming L.S. No. 519
 Signature of Surveyor Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Saramie

This "corner record" was filed for record on the 22nd day of March, 1973, was noted on the cross-index plat and is assigned page No. 12-166, in book No. ONE.

Joly B. Hillman
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____