

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Not applicable

Found: Nothing

Set: A the proportionate distance, a No. 5 x 24" rebar with 2 1/2" aluminum cap marked as noted below.

Aluminum Cap Markings

N 1/16
 S4 | S3
 1999
 WYOMING P.L.S. 2929

LARAMIE COUNTY CLERK
 CHEYENNE, WY.


1999 JUN 21 AM 9:06

254548

Date of Field Work: April 27, 1999

Office Reference: A.V.I. Job No. 2121

CROSS INDEX DIAGRAM

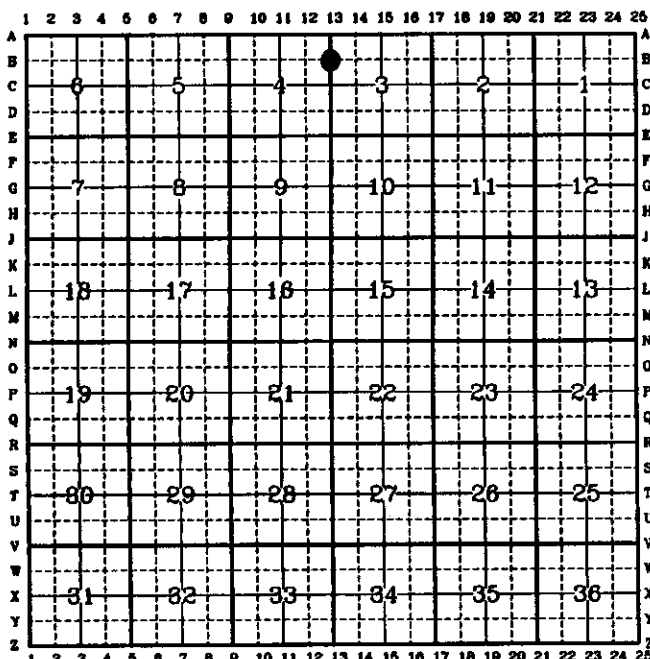

Firm/Agency, Address
 Paul A. Reid, P.L.S.
 2035 Westland Road
 Cheyenne, WY 82001

Telephone Number:
 (307) 637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name: N1/16 **Section:** 4 & 3 **T.12N., R.67W.; 6th P.M. Cross-Index No.:** B-13
SBRPEPLS/PLSW:March 1994