

## State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

**G.L.O. Record:** U.S. Deputy Surveyor, Edward D. Bright, Sept., 1868; 40.05 Chains ...Set boulder 17 x 12 x 8 for 1/4 sec. cor.

**Found:** Nothing

**Set:** At the proportionate distance from found and accepted corners east and west I set a 2 1/2 ins. diam. aluminum post, 30 ins. long, 24 ins. in the ground with a 3 1/4 ins. aluminum cap marked as noted below. Buried a 1 x 1 x 2 ins. orange flourescent magnetic module in the bottom of the monument hole. At the request of the land owner I did not set a steel fence post witness.


Aluminum Cap Markings

**T12N R67W**  
**S 4**  
 1/4 ———  
**S 9**  
**1999**  
**P.L.S. 2927**

Date of Field Work: March 9, 1999

Office Reference: A.V.I. Job No.: 2-2085C

**CROSS INDEX DIAGRAM**

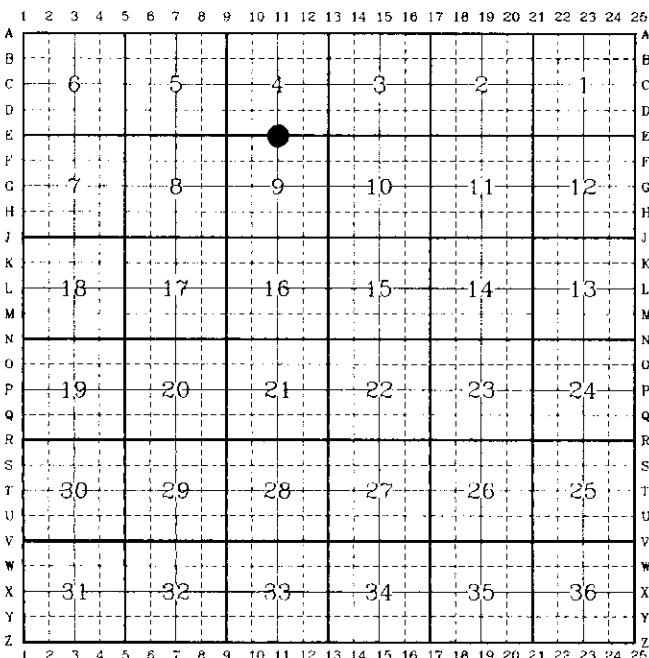


Firm/Agency, Address  
 Paul A. Reid, P.L.S.  
 A.V.I., p.c.  
 2035 Westland Road  
 Cheyenne, WY 82001

Telephone Number:  
 (307) 637-6017

This corner record was prepared by me or under my direction and supervision.

*SEAL & SIGNATURE*

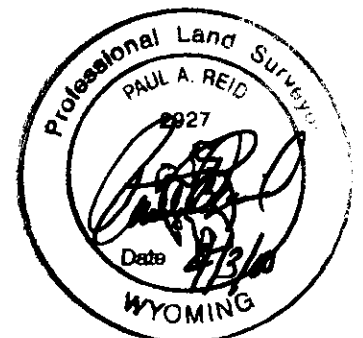

Corner Name: S 1/4 Section: 4  
 SBRPEPLS/PLSW: March 1994

T.12N., R.67W.; 6<sup>th</sup> P.M. Cross-Index No.: E-11

