

ላጋን ፀዛዓ ደብ - PM -**ዛ ዛዛ** 

## CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

Section Corner

Original Record: Not known

Found 4" x 8" x 12" - exposed granite stone, 5 notches on east side, 4 notches on south side, well-set

T. 12 N., R. 70 W.


DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set reference points (each 5/8" x 18" rebar with 1 1/2" aluminum cap, stamped "LS 566 RP")

See sketch.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.

(May Sketch or Paste Reproduction on Reverse Side.)

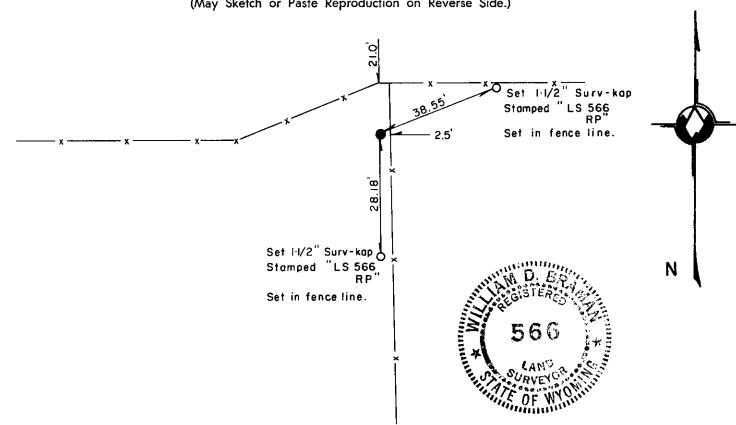

	And Anti-	RVEYOR MYONILLING
ı, <u>William D. Brama</u> n		erformed or reviewed the work
done on the diagrammed corner as reported on this r	ecordation form and approve the	same.
	William D. F	Mamai LS 566
	Signature of Surveyor	Registration No.
STATE OF WYOMING,		
Office of Clerk and Recorder,		
County of OVAINUL	<u> </u>	
This "corner record" was filed for record on the	day oflllgust	
on the cross-index plat and is assigned page No	, in book No	
	1-18 2V	
	Count	y Official
	Cross Index No. J-5 T.	. <u>/2</u> R. <u>70</u> Mer.
	<u>-</u>	R Mer.
	1. T	R Mer.
		R Mer.
	T.	R Mer.
	т.	R Mer.
OIL ADED	_	H2C