



State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 2013 Section 33-29-901 through 33-29-910, and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

CORNER FILED

SET: 5/8"X30" REBAR WITH A
 2-1/2", ALUM. CAP



LEGEND

- CORNER FILED
- RECOVERED ALUM. CAP
- SET 5/8"X30" REBAR
W/ALUMINUM CAP

NOTE:

1. BASIS OF BEARING IS WYOMING COORDINATE SYSTEM, NAD83, EAST ZONE - 4901

Monument Location

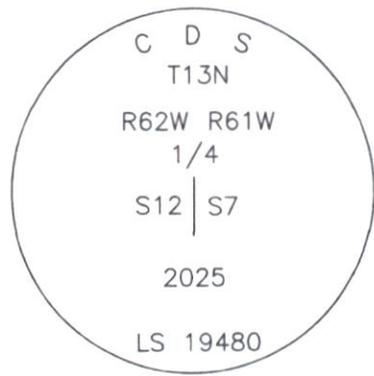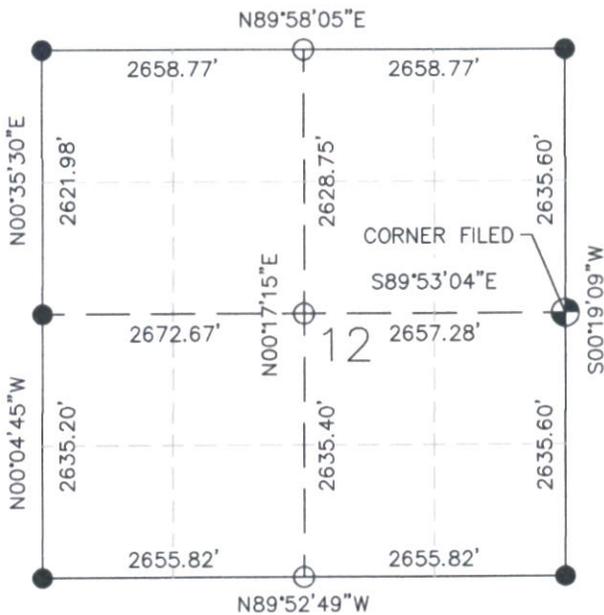


Monument Inscription

Date of Field Work: 04/28/2025

Office Reference: 25-03-0164:2

Cross Index Plat

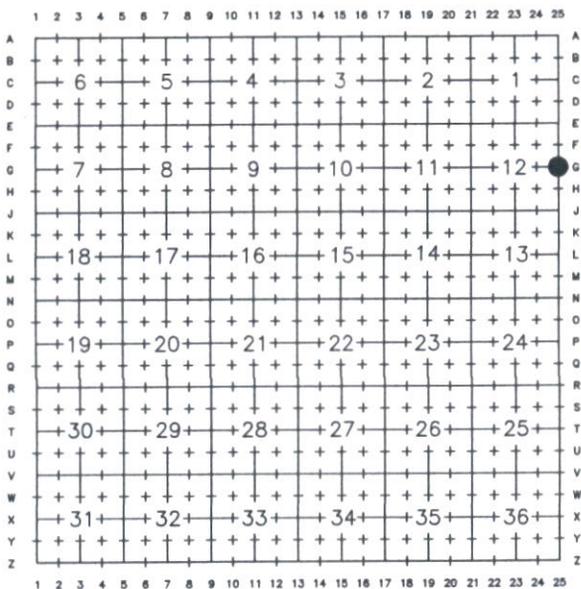

Firm/Agency, Address

FA COMMERCIAL DUE DILIGENCE SERVICES CO.
 3500 W. ROBINSON STREET,
 3RD FLOOR
 NORMAN, OK 73072
 (888) 457-7878

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name East 1/4 Corner Section 12, T 13 N, R 62 W, 6th P.M.

Cross-Index No.: G-25

WBPEPLS/PLSW: March 1994; PLSW January 1998, January 2019

County: LARAMIE