

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Edwin H. Van Antwarp, U.S. Surveyor, July 23, 1911

39.96 Chains Set an iron post, 3 ft. long, 1 inch diam., 2 1/2 ft. in the ground, for Standard 1/4 sec. cor., and mark on the brass cap on the post,


Found: Strong schonstedt reading at the record position from found monuments east and west. Position of reading is also inline with a projected N/S fence line north.

Set: This monument was not necessary for recovery in the survey I was involved with. This record is provided as notice to future surveyors. I set a P.K nail at schonstedt position.

Date of Field Work: July 1, 2006

Office Reference: Edith Lang Family Trust

CROSS INDEX DIAGRAM

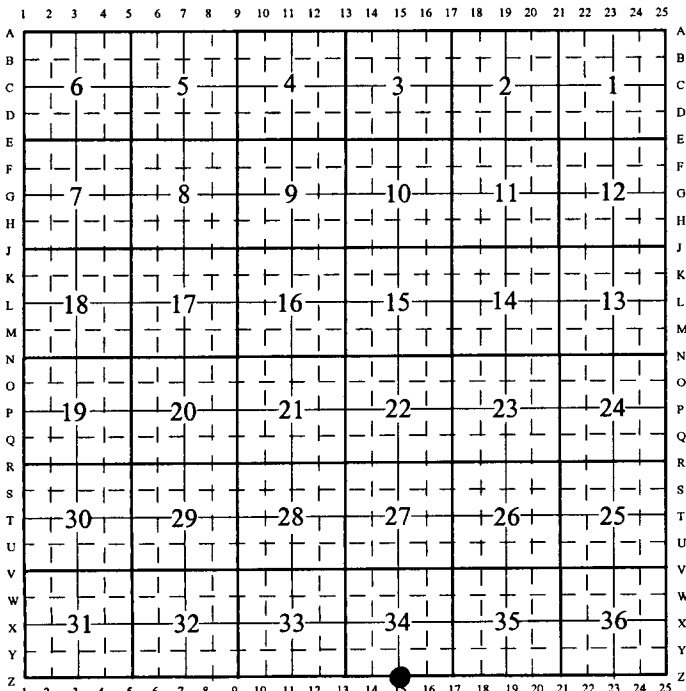

Firm/Agency, Address

Paul A. Reid, P.L.S.
1533 Pinion Drive
Cheyenne WY 82001
Phone (307) 637-3400

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name: S1/4 Corner Section: 34 T.13N., R.63W., 6th P.M., Cross-Index No.: Z-15
SBRPEPLS/PLSW: MARCH 1994/97