State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

FOUND: NOTHING


LARAMIE OGGRID OLERK

NOTE: SET BY SINGLE PROPORTION

SET: 36 ALIMINUM CAP ON 2 8" ALLIMINUM PIPE STAMPED AS SHOWN

GL.O. RECORD : LIMESTONE 18 % 84 4"


to NW Corner Sec. 4 = 2627.15'
to NE Corner Sec. 4 = 3627.15'

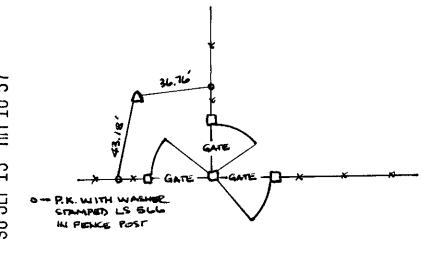

NOTE: FOUND NW CORNER SEC 4 AS SHOWN ON CORNER FORM BY JOHN STEIL, PLS 2500.

Date of Field Work: 17 July 1995 Office Reference: 2823

CROSS INDEX DIAGRAM



Firm/Agency, Address

INTERMOUNTAIN PROFESSIONAL SERVICES, INC. 5801 0SAGE AVENUE CHEYENNE WY 82001

Telephone Number: (307) 632-3138


This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

T 14 N

T 13N

PLS 566



Corner Name: 4 CORNER 33 Section: TIBN RAW: L P.M. Cross-Index No.: A-11