State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36—11—101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

NOTE: THE CORNER RECORD FOR THE MONUMENT PREVIOUSLY SET AS RECORDED 3-16-90 IN BOOK 1284 AT PAGE 1594 WAS FOUND TO HAVE BEEN SET IN THE INCORRECT LOCATION, REMOVED PREVIOUSLY SET MONUMENT AND REPLACED PER THIS CORNER RECORDATION FORM. REMOVED MONUMENT WAS 25' WEST OF NEW LOCATION.

MONUMENT SET: SET A 5/8" X 24" REBAR WITH 2" ALUMINUM CAP, STAMPED AS SHOWN BELOW.

REFERENCES: SET P.K'S FOR REFERENCES. DISTANCES SHOWN BELOW.

GLO RECORD: GRANITE BOULDER 15"X9"X6"

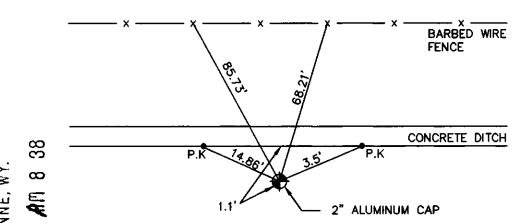



L75598
LARAMIE COUNTY CLERK
CHEYENNE, WY.

Date of Field Work:

THIS FORM REPLACES PREVIOUS SUBMISSIONS ALSO SEE RECORD OF SURVEY OF "CAMPSTOOL RANCHETTETS"

12-12-94

SSS 1/4 S 9 (S 2500

Firm/Agency, Address

94222

Office Reference:


STEIL SURVEYING SERVICES, LLC
1102 WEST 19th STREET

CHEYENNE WY 82001

Telephone Number: <u>(307)</u> 634-7273

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



BOOK 1 4 1 5 ORTH QUARTER CORNER SERPEPLS /PLSW: March 1994

Section: 9 T 13N R 64W; 6th P.M. Cross-Index No.: E-11