
## State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33—29—140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of comer monumentation evidence found and/or monument and accessories established to perpetuate the location of this comer. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent comer(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

<u>U.S.G.L.O. 1870 Record: Set a limestone 15x10x6 for corner to sections 12, 13, 7 & 18.</u> Found No. 4 rebar, 0.5' below gravel road surface per corner record dated Frbruary 9, 1979 by PLS 519. Rehabilitate with a 2-1/2" Aluminum Cap on a 30" no. 6 rebar 0.6' below the gravel road surface of CR 207. Said Aluminum Cap is inscribed as shown below.

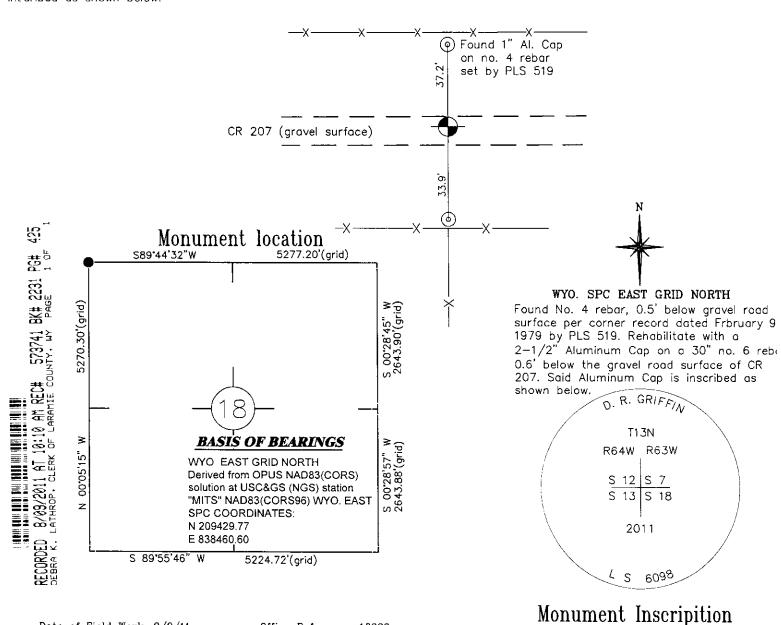

Cross Index Plat

Date of Field Work: 3/8/11

+19+

+20+

+29+

32+

+21+

+28

Office Reference: 18323

by me or under my direction RONALD C. RENNKE and supervision. D. R. GRIFFIN & ASSOCIATES 6 2 SEAL & SIGNATURE 1414 ELK STREET ROCK SPRINGS, WYOMING 82901 Ţ Telephone Number: (307) 362-5028 8 Sessional Lang State of Control o + + + +18+ +15+ + [

Firm/Agency, Address

3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 16 19 20 21 22 23 24 25

Corner Name Northwest Corner Section 18, T 13 N, R 63 W, 6th P.M. 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 Same Corner As Northeast Corner Section 13, T 13 N, R 64 W, 6th P.M. Wyoming County: <u>Laramie</u>,

Cross-Index No.: J-1 Cross-Index No.: <u>J-25</u>

This corner record was prepared

Wyoning feet

SBRPEPLS/PLSW: March 1994; PLSW January 1998

+22+

+

Ţ +

+23+

+26+

+35+

+