State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Edwin James, U.S. Deputy Surveyor, June 5, 1999; 80.00 ChainsSet a sand stone 18 x 10 x 8 for corner to sections 19, 20, 29 & 30.

Found: No evidence of original monumentation. Found a broken stone marked "wccr" northeasterly of corner position.

Set: At S45°W, 56.57' from the found "wccr" stone, I set a No. 6 x 30" rebar with 3 1/4" aluminum cap marked as noted below. Set a 5' steel fence post witness north.

Aluminum Cap Markings
A.V.I. P.C.

T13N R64W

S19 | S20

S30 | S29

1999


P.L.S. 2927

See back of this sheet for measurements to other found or set corners in the area.

RECORDED 7/19/1999 AT 1:55 PM REC# 256588 BK# 1527 PG# 1052 DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, MY PAGE 1 OF 2

Date of Field Work: April 26, 1999 Office Reference: A.V.I. Job No. 2-2122

CROSS INDEX DIAGRAM



Firm/Agency, Address Paul A. Reid, P.L.S. A.V.I., p.c. 2035 Westland Road Cheyenne, WY 82001

Telephone Number: (307) 637-6017


This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name: SW Cor. SBRPEPLS/PLSW:March 1994 Section: 20

T.13N., R.64W.; 6th P.M. Cross-Index No.: R-5

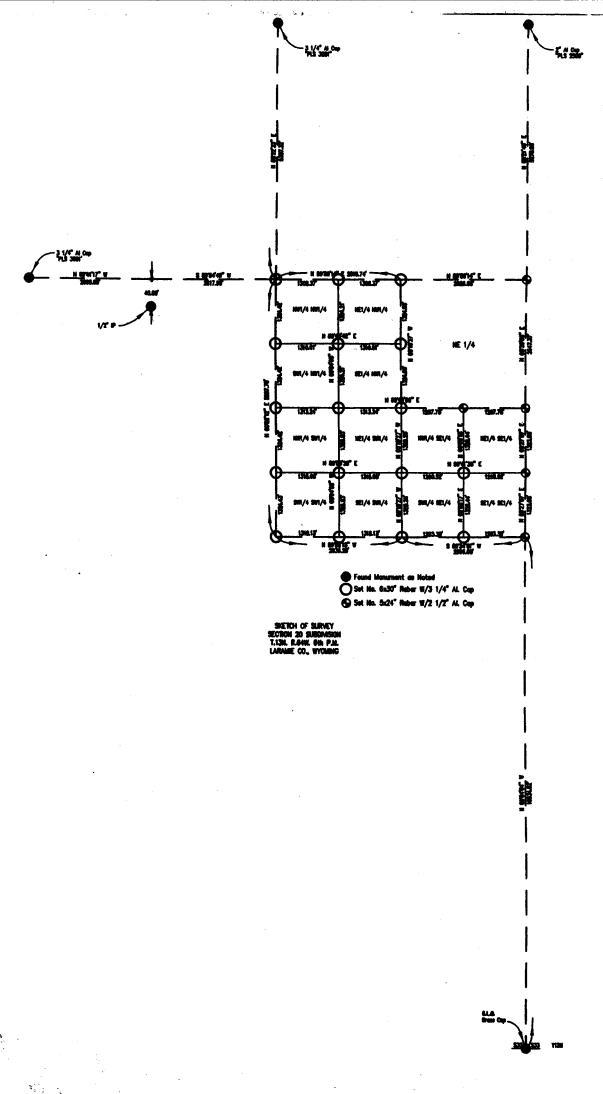

256588 BK# 1527 PG# 1052 A