

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Edwin James, U.S. Deputy Surveyor, June 5, 1999; 39.81 1/2 Chains..... Set a sand stone 16 x 10 x 6 for quarter section corner.

Found: A 14" x 10" x 6" marked sandstone in a old mound of earth. Sandstone was marked with a 1/4 on the north face with one faint discernable pit east @ 5 1/2' distance. Sandstone was 38' north of a east west fenceline.

Set: No. 6 x 30" rebar with marked 3 1/4" aluminum cap as noted below. Buried original stone as a memorial south. Set a 5' steel fence post as a witness 1' north.


Aluminum Cap Markings
 A.V.I. P.C.
 T13N R64W
S20
S29
 1999
 P.L.S. 2927

RECORDED 7/19/1999 AT 1:55 PM REC# 256590 BK# 1527 PG# 1054
 DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

Date of Field Work: April 23, 1999

Office Reference: A.V.I. Job No. 2-2122

CROSS INDEX DIAGRAM

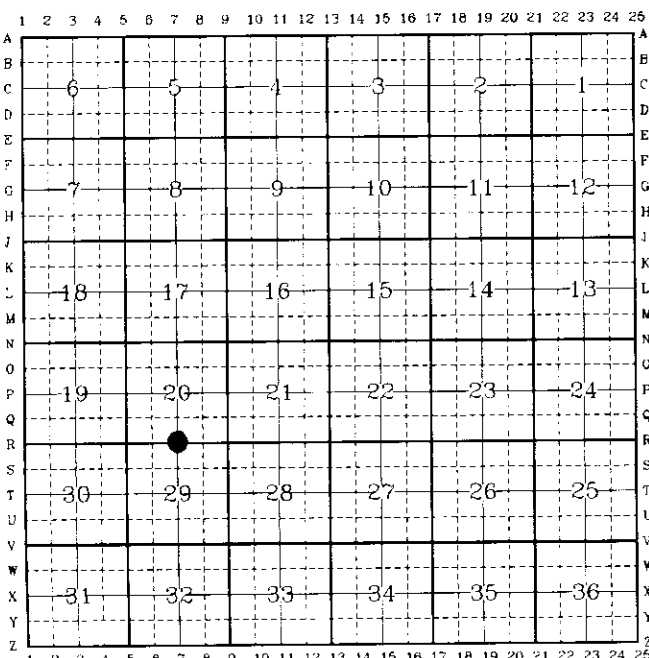


Firm/Agency, Address
 Paul A. Reid, P.L.S.
 A.V.I., p.c.
 2035 Westland Road
 Cheyenne, WY 82001

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

Telephone Number:
 (307) 637-6017

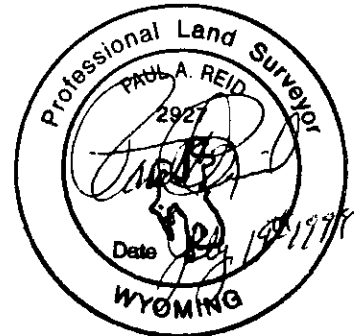

Corner Name: S 1/4
 SBRPEPLS/PLSW: March 1994

Section: 20

T. 13N., R. 64W.; 6th P.M. Cross-Index No.: R-7