

RECEIVED  
LARAMIE COUNTY  
CHEYENNE, WY.

'88 DEC 23 AM 9 09


CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

Found: Granite boulder, 10" x 10" x 6", possibly broken, with clearly chiseled "1/4" -- found about 200 feet north of witness corners, lying loose in the road, clearly disturbed. Used witness corners to establish position for monument.

Accessories found - See notes on back.

GLO: "Set granite boulder 14" x 8" x 5" for 1/4 sec. cor."




DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set: Set driveable aluminum monument, 36" long, with 3" aluminum cap. See Map of Survey filed with Laramie County Clerk for dimensions to adjacent corners.

Set 5/8"x24" rebar with 2" cap stamped "ESMT COR" 40' east of corner

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)

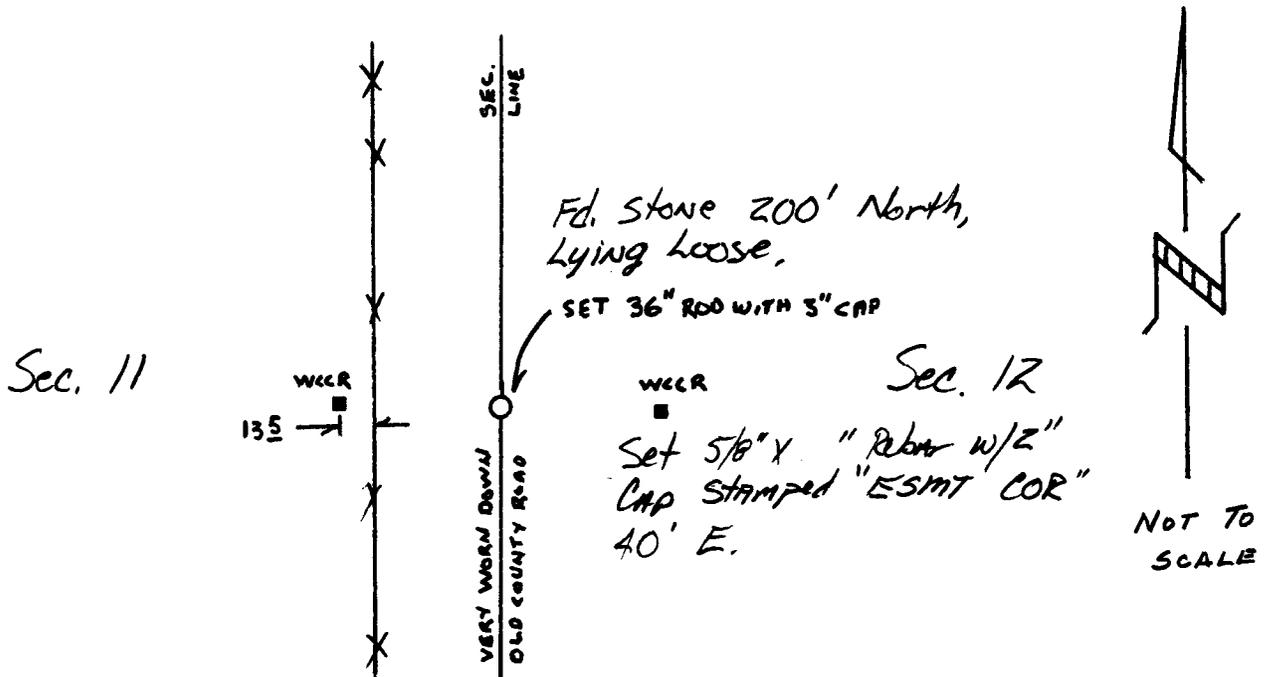

I, BECKY J. BRAMAN certify that I have personally determined or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Becky J. Braman Signature of Surveyor  
PLS 3881 Registration No.



STATE OF WYOMING,  
Office of Clerk and Recorder,  
County of LARAMIE

This "corner record" was filed for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_, was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. \_\_\_\_\_.

County Official

Cross Index No. <u>421</u>	T. <u>13N</u>	R. <u>65W</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Witness corner - Well-set granite stone lying west with  
chiseled "WCCR" on east face.

Witness corner - Well-set granite stone lying east with chiseled  
"WCCR" on west face.

Note: Laramie County Engineer's office has no specific notes on the  
witnessing of this road, but other notes, especially the Chalk  
Bluffs Road notes, show corners set 40 feet to the East and West  
of North-South road and set at 56.4 feet diagonally from  
intersections, usually NE and NW.