

RECEIVED  
LARAMIE COUNTY  
CHEYENNE, WY.

'88 DEC 23 AM 9 08

CERTIFIED LAND CORNER RECORDATION


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)  
No corner set by GLO.

Center  
1/4  
Sec. 12  
T 13N, R 65W

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set: At proportionate distance, set driveable aluminum monument, 36" long, with 3" aluminum cap. Set easement corners as shown, 5/8" x 24" rebar with 2" aluminum cap. See Map of Survey filed with Laramie County Clerk for dimensions to adjacent corners.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
(May Sketch or Paste Reproduction on Reverse Side.)

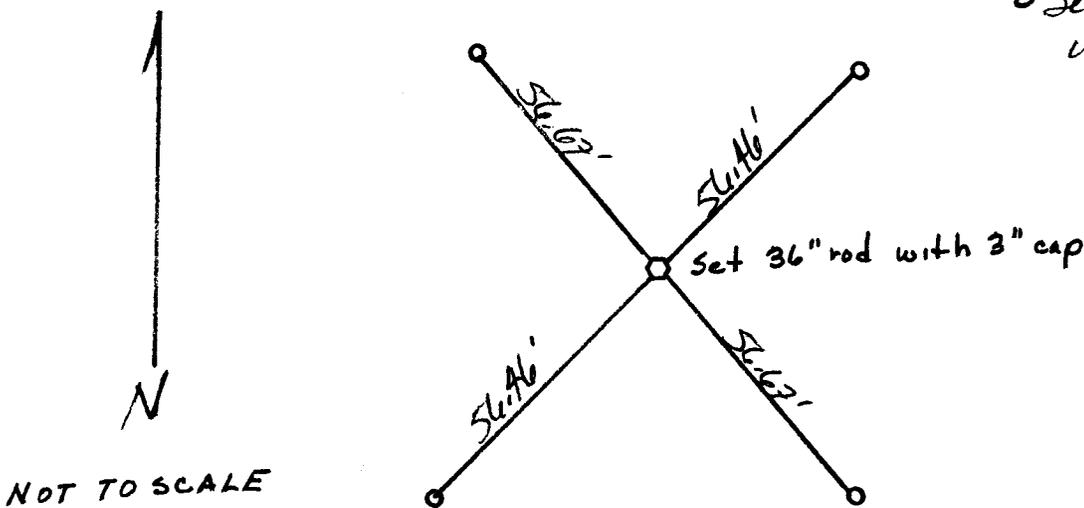


I, BECKY J. BRAMAN

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

**DUE TO ROAD CONSTRUCTION, DRIVEABLE MONUMENT IS NOT YET SET. IT WILL BE SET BY 6-30-89.**

Signature of Surveyor



P.L.S. 3881  
Registration No.

STATE OF WYOMING,  
Office of Clerk and Recorder,  
County of LARAMIE

This "corner record" was filed for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_, was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. \_\_\_\_\_.

County Official

Cross Index No. <u>633</u>	T. <u>13N</u>	R. <u>65W 6<sup>th</sup></u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.