

052596

RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

CERTIFIED LAND CORNER RECORDATION

88 DEC 23 AM 9 09

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

Found: Limestone 4" x 6" x 14", loose. Stone has "1/4" chiseled on the east(?) face. Used witness corners to establish position for monument.
Accessories found - See notes on back.
GLO: "Set limestone 14" x 9" x 5" for 1/4 sec.cor."


1/4
Sec. 14 • Sec. 13

T 13N, R65W

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Set: Set aluminum pipe monument, 2" i.d., 36" long, with 3" aluminum cap. See Map of Survey filed with Laramie County Clerk for dimensions to adjacent corners.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)

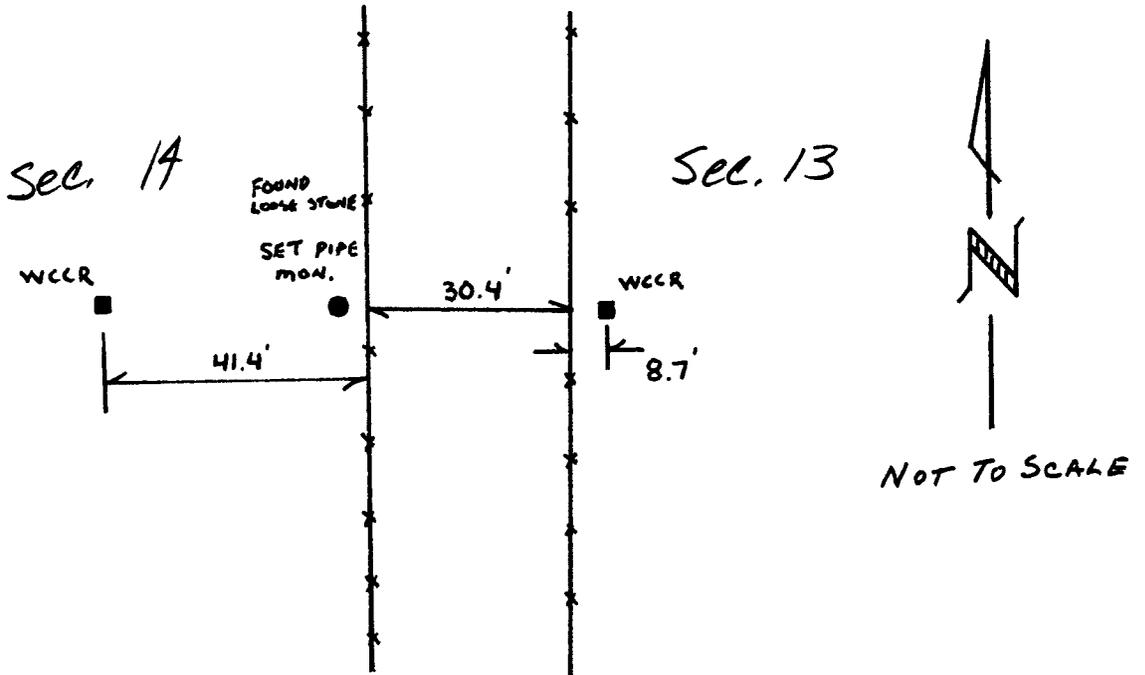

I, BECKY J. BRAMAN certify that I have carefully participated or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Becky J. Braman PLS 3881
Signature of Surveyor Registration No.
12-22-88



STATE OF WYOMING,
Office of Clerk and Recorder,
County of LARAMIE

This "corner record" was filed for record on the _____ day of _____, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

County Official			
Cross Index No. <u>121</u>	T. <u>13N</u>	R. <u>65W</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

BOOK 1268

1294

Witness corner - granite stone lying east with chiseled "WCCR" on west face. Stone is 6" x 6", protrudes 2" above ground.

Witness corner - Pink and black granite stone lying west with chiseled "WCCR" on west face. Stone is 5" x 9", protrudes 3" above ground.

Note: Laramie County Engineer's office has no specific notes on the witnessing of this road, but other notes, especially the Chalk Bluffs Road notes, show corners set 40 feet to the East and West of North-South road and set at 56.4 feet diagonally from intersections, usually NE and NW.