State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36—11—101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

GLO RECORD: UNKNOWN.

MONUMENT FOUND: FOUND A 5/8" REBAR AND RESET.

MONUMENT SET: SET A 5/8" X 24" REBAR WITH 2" ALUMINUM CAP, CAP MARKED AS SHOWN BELOW.

REFERENCES: REFERENCES SHOWN BELOW.

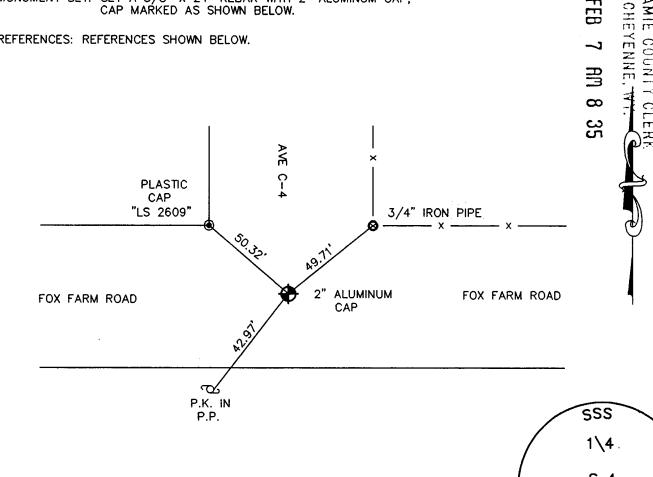

95074 Date of Field Work:

CROSS

_Office Reference:

3-14-95

INDEX DIAGRAM

STEIL SURVEYING SERVICES,LLC 1102 WEST 19th STREET

Firm/Agency, Address

CHEYENNE 82001

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

S

1995

2500



Telephone Number: <u>(307)</u> 634-7273

Corner Name: SOUTH 1\
SBRPEPLS/PLSW: March 1994 SOUTH 1\4 Section: 4 T13N R 66W: 6th P.M. Cross-Index No.: E-11

0931