CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

T13N
1/4 10|11
R66W

NOT KNOWN

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

SET 1/2" DIAMETER x 24" LONG REBAR, 20" IN THE GROUND, WITH ALUMINUM CAP MARKED "BRW/NOBLITT L.S. 2500" ENCIRCLED BY A COLLAR OF STONE. RAISED A MOUND OF STONE WITH 2' BASE, 1' HIGH WEST OF IRON, AT PROPORTIONATE DISTANCE.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

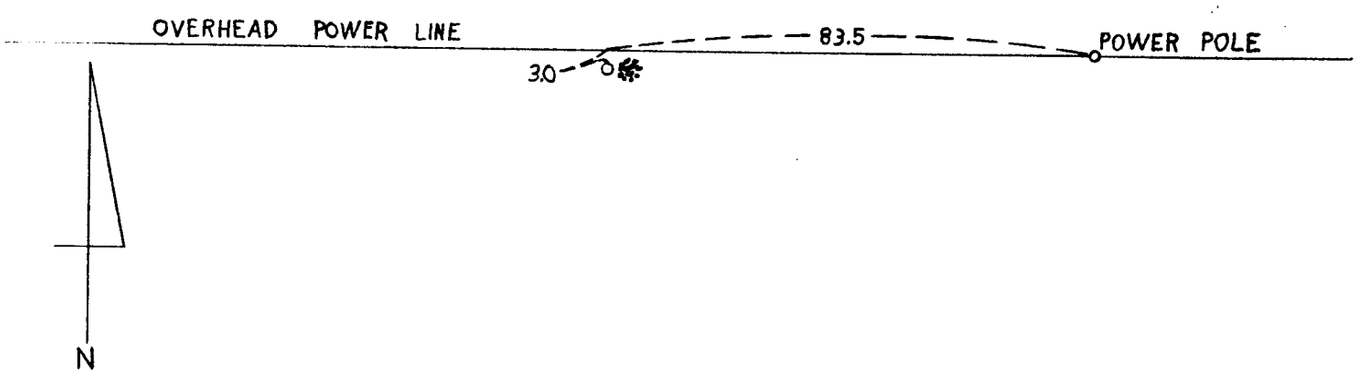

I, JOHN A. STEIL certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

John A. Steil — Signature of Surveyor
2500 — Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Laramie

649928

This "corner record" was filed for record on the _____ day of MAR 5 1982, 19____, was noted on the cross-index plat and is assigned page No._____, in book No._____

Janet C Whitehead
County Official

Cross Index No. G-17 T. 13 R. 66 Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.