## CERTIFIED LAND CORNER RECORDATION

### DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

T.13 N.
10 | 11
15 | 14
R.66 W.

FOUND: A GRANITE STONE 6" x 12" x 18" LYING ON TOP OF GROUND AT FENCE LINE GROOVED ON A FACE & 2 NOTCHES ON A FACE IN FENCE SE. OF SET MONUMENT.

APPROX. 350' SOUTH OF TRUE POSITION

### DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

SET: 5/8" x 15" REBAR. 14" IN THE GROUND W/ALUMINUM CAP STAMPED L.S. 2500 ENCIRCLED BY A COLLAR OF STONE. RAISED A MOUND OF STONE W/ 2-1/2' BASE & 1-1/2' HIGH, NORTH OF IRON. AT PROPORTIONATE DISTANCE

### SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

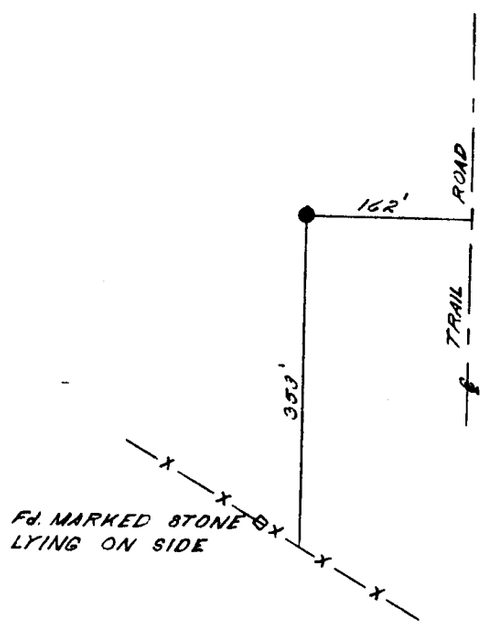





I, JOHN A. STEIL certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

John A. Steil — Signature of Surveyor

2500 — Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Laramie

649911

This "corner record" was filed for record on the _____ day of MAR 5 1982, 19____, was noted on the cross-index plat and is assigned page No._____, in book No._____

Janet C Whitehead
County Official

Cross Index No. J-17 T. 13 R. 66 Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.
_____ T. _____ R. _____ Mer.