

**CERTIFIED LAND CORNER RECORDATION**



DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

LOCATION Found a granite boulder, 8" x 10", with 2 grooves on south and 5 grooves on east face.  
 S.19 S.20  
 S.30 S.29 Stone is well planted and protected by fences.  
 T.13N., R.66W.  
 6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

None

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
 (May Sketch or Paste Reproduction on Reverse Side.)

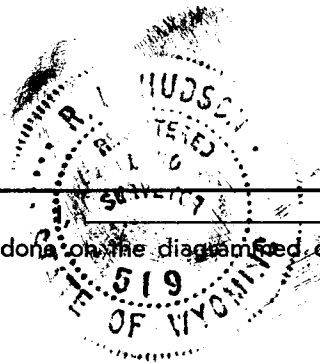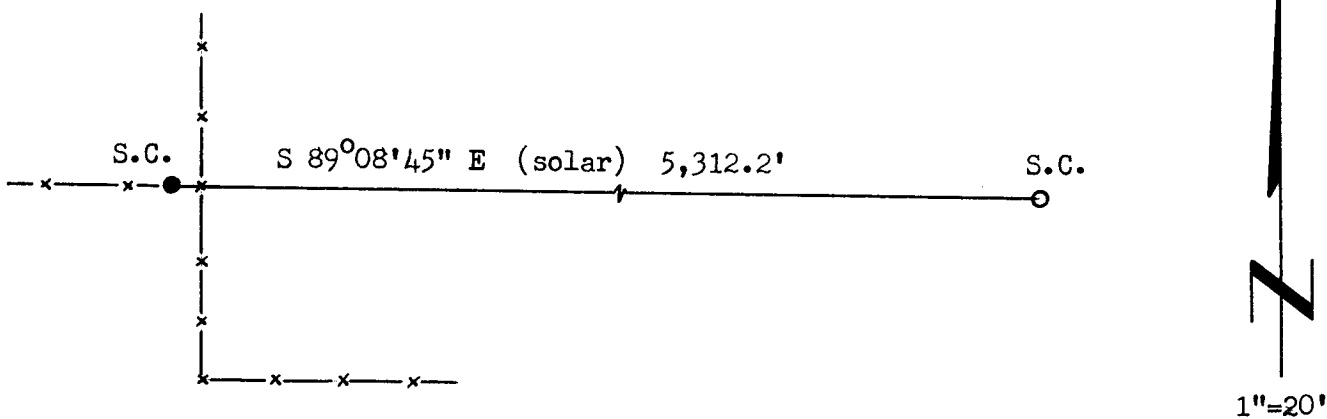

R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson Wyoming L.S. No. 519  
 Signature of Surveyor Registration No.

STATE OF WYOMING,  
 Office of Clerk and Recorder,  
 County of Saramie

This "corner record" was filed for record on the 18th day of January, 1973, was noted on the cross-index plat and is assigned page No. 13-62, in book No. ONE.

John B. Williams  
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

Photographed \_\_\_\_\_

Indexed  \_\_\_\_\_

Posted \_\_\_\_\_

The State of Wyoming } SS  
County of Laramie

This instrument was filed for record  
at 10:23 o'clock P. M. on the  
18th day of January  
A. D. 19 23 and duly recorded in  
Book \_\_\_\_\_ on page \_\_\_\_\_

*John A. Williamson*

\_\_\_\_\_  
Clerk & Ex-Officio Register of Deeds  
Deputy