

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors.)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RECORD: Set Granite Boulder 18 x 9 x 7 for corner to Sec's 19, 20, 29, & 30. Henry G. Hay, U.S. Deputy Surveyor, August, 1870.

Subsequent Record: Certified Land Corner Recordation filed by Mr. Edward Fry, Wyoming P.E. & L.S. No. 662 indicating found stone and burying along remonumented corner point being a Iron Pipe with 2" Aluminum Cap.

Found: September 7, 1995, a 21" x 11" x 8" marked granite stone 9" out of the ground. Stone was half buried. Reburied the stone along the Mr. Edward Fry monument. Fry monument was 2' west of fence corner post of fences extending North, South and West.

Monument Markings

CIVIL ENGINEERING SER

19	20
30	29


PE LS 662

171150

LARAMIE COUNTY CLERK
CHEYENNE, WY.
,95 OCT 26 PM 1 09

Date of Field Work: August 7-95 **Office Reference:** Job No. 2-1918.95

CROSS INDEX DIAGRAM

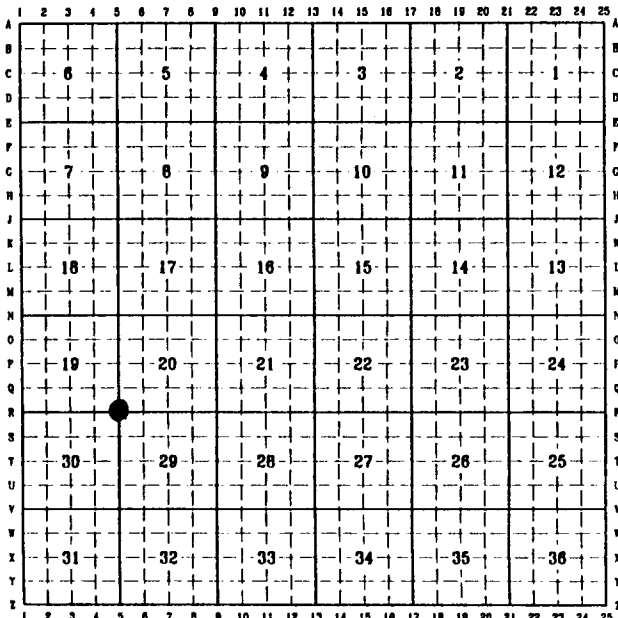

Firm/Agency, Address

PREPARED BY:
Paul A. Reid, P.L.S.
A.V.I., P.C.
2035 Westland Rd.
Cheyenne, WY 82001

(307) 637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



1468

BOOK 1409