

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)


T. 13 N.
 34 | 35
 R. 66 W.

SET 1/2" X 1/8" REBAR W/ ALUMINUM CAP MARKED AS SHOWN BELOW ENCIRCLED BY A MOUND OF STONE. CORNER ESTABLISHED THROUGH COUNTY ROAD TIES


DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

SEE TIES BELOW

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)

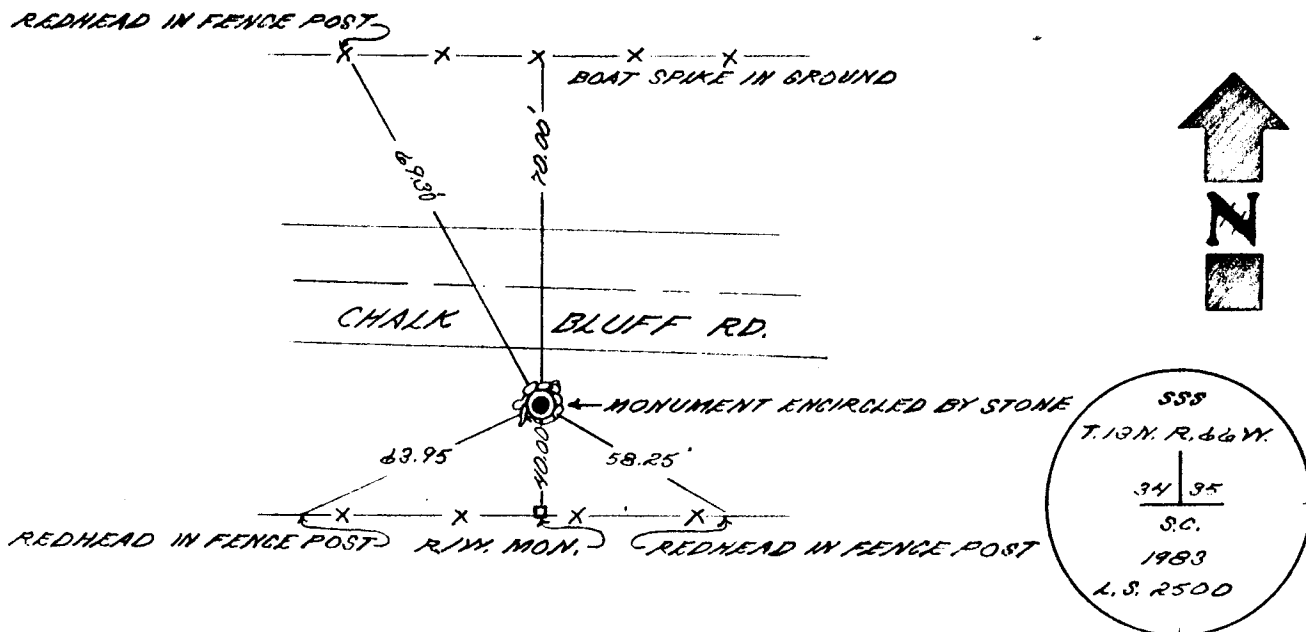

I, JOHN A STEIL certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

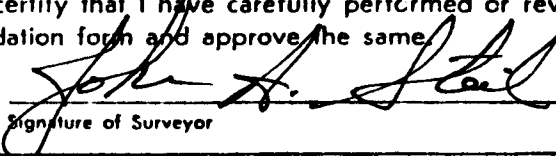
 Signature of Surveyor L.S. 2500
Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Sasani

692526

This "corner record" was filed for record on the _____ day of June C Whitehead, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____

APR 6 1983

	County Official			
Cross Index No. <u>2-17</u>	T. <u>13</u>	R. <u>66</u>	Mer.	
_____	T. _____	R. _____	Mer.	
_____	T. _____	R. _____	Mer.	
_____	T. _____	R. _____	Mer.	
_____	T. _____	R. _____	Mer.	
_____	T. _____	R. _____	Mer.	
_____	T. _____	R. _____	Mer.	

2-17-13-66