


# Wyoming Certified Land Corner Recordation Certificate


*This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.*

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

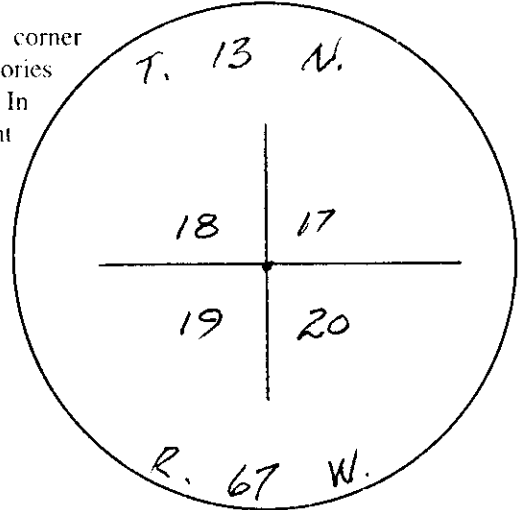

**Monument Inscription**

Field Date \_\_\_\_\_ Office Reference \_\_\_\_\_

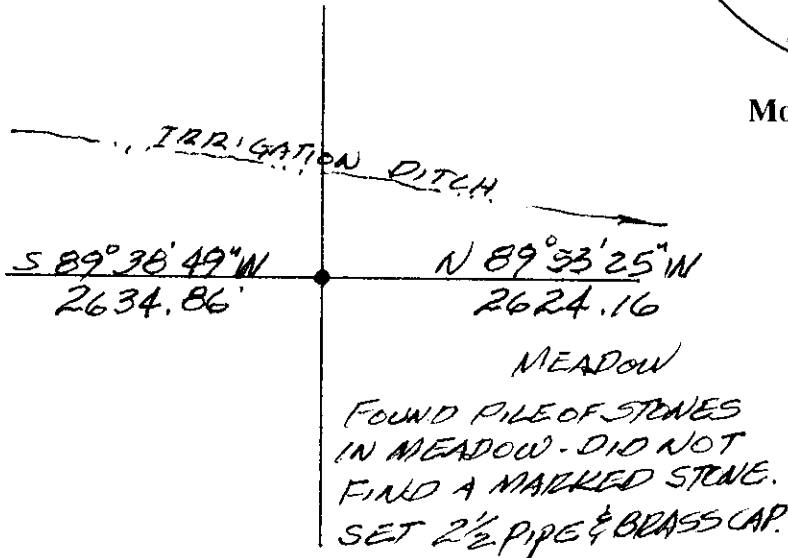

**State of Wyoming**

Office of County Clerk

County of Laramie

This Certified Land Corner Recordation Certificate was filed for record on the 18<sup>th</sup> day of Oct, 1991, in Book No. T 13, R 67, on Alpha-Numeric coordinates N-5 and was noted on the Cross Index Plat.

*Janet C. Whitcomb*  
County Clerk

Corner Type:

Aliquot Corner       Other

Section(s) 18, 17, 20, 19 Meridian 6<sup>th</sup> PM

Corner Name SEC. COR Township 13 N Range 67 W Page \_\_\_\_\_

Sheet \_\_\_\_\_ of \_\_\_\_\_

**Directions for using the  
Cross Index Plat**

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

**Cross Index Plat**

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
A																									A
B																									B
C					6																				C
D																									D
E																									E
F																									F
G																									G
H																									H
I																									I
J																									J
K																									K
L																									L
M					18																				M
N																									N
O																									O
P					19																				P
Q																									Q
R																									R
S																									S
T					30																				T
U																									U
V																									V
W																									W
X					31																				X
Y																									Y
Z																									Z
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25

**State Plane Coordinates (optional)**

Zone  W  WC  EC  E feet/meters

NAD 1927  NGVD 1929  NAD 1983  NAVD 1988

North (Y) = \_\_\_\_\_ East (X) = \_\_\_\_\_ EL = \_\_\_\_\_

Latitude \_\_\_\_\_ Longitude \_\_\_\_\_

Scale Factor \_\_\_\_\_ Geoid Height \_\_\_\_\_

**Certification**

I, DONALD M. HOPKINS, Wyoming PLS/PE 558 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency DM Hopkins & Assoc.

Mailing Address Box 6106

Street Address \_\_\_\_\_

City, State, ZIP CHEYENNE, WY 82003

Telephone, FAX 632-4763



Donald M. Hopkins  
Signature, Seal, and Date

Sheet \_\_\_\_\_ of \_\_\_\_\_

LARAMIE COUNTY  
 CHEYENNE, WY.  
 '91 OCT 18 PM 1 25  
 090851