State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). "ketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: U.S. Deputy Surveyor, Henry G. Hay, September, 1870; 39.80 Chains Set Granite Boulder 15 x 9 x 7 for 1/4 Sec. Cor.

Found: 11" x 9"x 6" Granite Stone in a mound of stone. Stone was firmly set with all of the 1/4 marked on the North face visible.

Set: No. 5 x 24" rebar, flush to the ground and along the east edge of the stone as a memorial.

Basis of Bearings and Distances for the ties below were derived with the utilization of the Trimble RTK GPS system and a in the field calibration based upon the City of Cheyenne Control Stations from "PORT" to "CLEAR CREEK" being N15°41'10.1"W @ 12946.09', with the geodetic position of "PORT" being held at NAD 83-94 (HARN) being 41°04′ 14.67261" Latitude, 104°52′24.94536" Longitude, 6283.99 Height.

Point Identification

Bearing

Distance

Monumentation

Sec. Cor. 21/22/27/28


N89°49'08"E

2617.85'

Original Stone

Date of Field Work: Sept. 2,1999 Office Reference: A.V.I. Job No. 2157

CROSS INDEX DIAGRAM

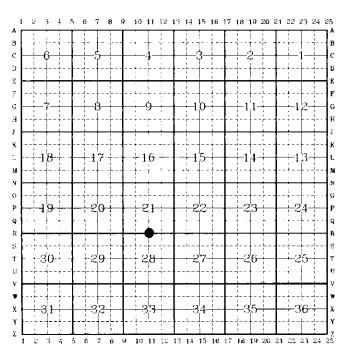

Corner Name: S 1/4 Cor., Section: 21 SBRPEPLS/PLSW:March 1994

Firm/Agency, Address Paul A. Reid, P.L.S. A.V.I., p.c. 2035 Westland Road Cheyenne, WY 82001

Telephone Number: (307) 637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



260079 BK# 1532 PG# 1060

T.13N., R.67W.; 6th P.M. Cross-Index No.: R-11