

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: U.S. Deputy Surveyor, Henry G. Hay, September 2, 1870.; 39.85 Chains....Set Granite Boulder 15 x 10 x 5 for 1/4 Sec. Cor.


Found: 8 ins. x 4 ins. x 5 ins. out of the ground, granular granite type stone, well set and well marked with 1/4 on the Southwesterly face.

Set: 5 ft. steel fence post witness.

Date of Field Work: Nov. 17, 1998

Office Reference: A.V.I. Job No. 2085C

CROSS INDEX DIAGRAM

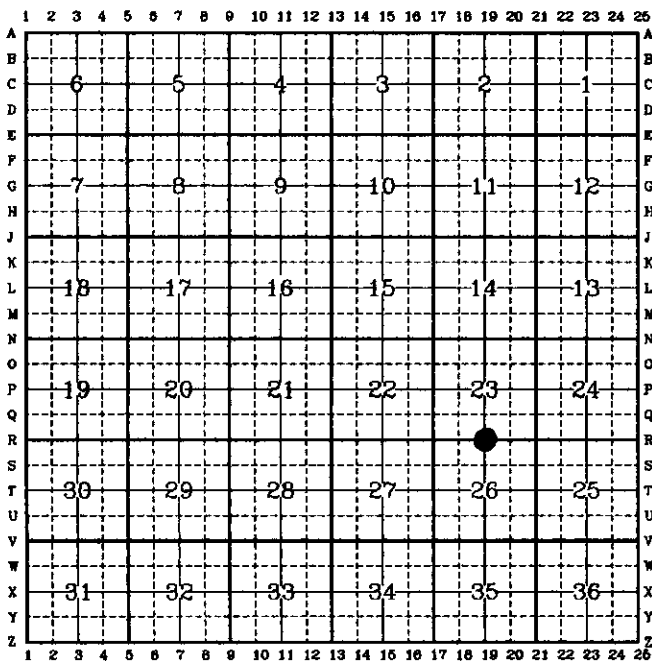

Corner Name: S 1/4
SBRPEPLS/PLSW:March 1994

Section: 23

T.13N., R.67W.; 6th P.M. Cross-Index No.: R-19

Firm/Agency, Address
Paul A. Reid, P.L.S.
A.V.I., p.c.
2035 Westland Road
Cheyenne, WY 82001

Telephone Number:
(307) 637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

