

## State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

**G.L.O. Record:** U.S. Deputy Surveyor, Henry G. Hay, September, 1870, 40.00 Chains Set Granite Boulder 15 x 10 x 10 for 1/4 Sec. Cor.

**Found:** Nothing.

**Set:** This corner was reestablished utilizing the State of Wyoming, State Highway Department Plan and Profile Sheets designated as I-25-1(21)2, which indicates a stone was found 24.0 feet south of centerline station 360+58.8. This position appears to be within limits from found original corners north and south and accepted by me as the best available evidence of the original corner position. At the corner point I set a No. 5 x 40" rebar with appropriately marked, per B.L.M. Manual and State of Wyoming requirements, a 2 1/2" Aluminum Cap. Corner monument is approximately 7' East of Westerly edge of the Northbound lanes and approximately 24.5' West of the Easterly edge of the Southbound lanes of I-25.


**Basis of Bearings and Distances** for the ties below were derived with the utilization of the Trimble RTK GPS system and a in the field calibration based upon the City of Cheyenne Control Stations from "PORT" to "CLEAR CREEK" being N15°41'10.1"W @ 12946.09', with the geodetic position of "PORT" being held at NAD 83-94 (HARN) being 41°04' 14.67261" Latitude, 104°52'24.94536" Longitude, 6283.99 Height.

Point Identification	Bearing	Distance	Monumentation
Sec. Cor 28/27/34/33	N00°05'50"W	2655.47'	3 1/4" Al. Cap PLS2500
Sec. Cor. 33/34	S00°02'21"E	2639.41'	Original Stone

Date of Field Work: Sept. 2, 1999

Office Reference: A.V.I. Job No. 2157

**CROSS INDEX DIAGRAM**

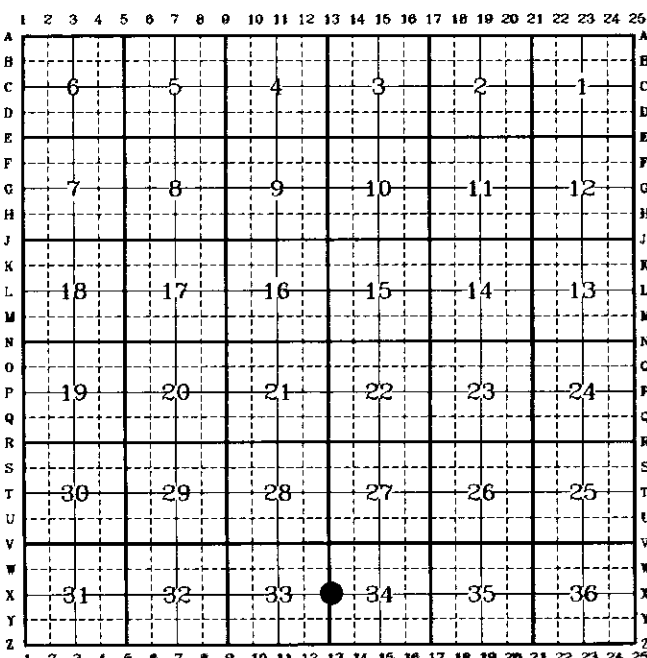

Firm/Agency, Address  
 Paul A. Reid, P.L.S.  
 A.V.I., p.c.  
 2035 Westland Road  
 Cheyenne, WY 82001

Telephone Number:  
 (307) 637-6017

This corner record was prepared by me or under my direction and supervision.

*SEAL & SIGNATURE*



RECORDED 9/09/1999 AT 4:05 PM REC# 260081 BK# 1532 PG# 1062  
 DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

Corner Name: W 1/4  
 SBRPEPLS/PLSW: March 1994

Section: 34

T.13N., R.67W.; 6<sup>th</sup> P.M. Cross-Index No.: X-13