

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: 40.00 chains, Set a boulder stone 14 x 8 x 8 for 1/4 sec. cor.

Found: Somewhat loose 8 ins. x 8 ins. x 7 ins. pink colored granite stone marked 4 on the north face in a collar of 6 stones. Top portion of the stone was knocked off thereby making only the 4 visible on the markings.

Set: 2 1/2 ins. diam. aluminum post, 30 ins. long, 24 ins. in the ground with a 3 1/4 ins. aluminum cap marked as noted below. Buried 1 x 1 x 2 ins. flourescent magnetic module set in the bottom of the monument hole. Bury the original stone as a memorial south and raised a small collar of stones around the corner monument. Set a 5 ft. steel fence post witness 1 ft. north.


Aluminum Cap Markings

T13N R67W
S33
1/4 ———
1999
P.L.S. 2927

Date of Field Work: April 27, 1999

Office Reference: A.V.I. Job No. 2-2085C


CROSS INDEX DIAGRAM

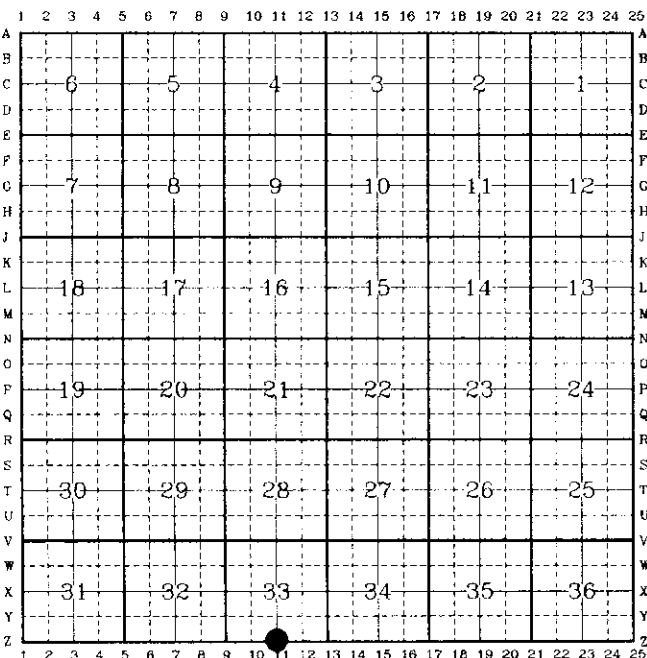

Firm/Agency, Address
 Paul A. Reid, P.L.S.
 A.V.I., p.c.
 2035 Westland Road
 Cheyenne, WY 82001

Telephone Number:
 (307) 637-6017

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE

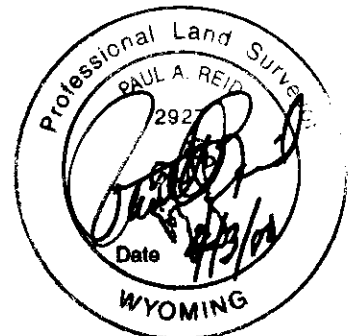

Corner Name: S1/4 Section: 33 T.13N., R.67W.; 6th P.M. Cross-Index No.: Z-11
 SBRPEPLS/PLSW:March 1994