

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: 80.00 chains, Set a Granite stone 16 x 10 x 4 for S.C. to secs 34 & 35 of Tp 13 N R 67 W..

Found: Somewhat loose 18" x 9" x 3 1/2" marked tan colored granite stone with 2 notches on the east edge and 4 notches on the west.

Set: 2 1/2" x 30" aluminum pipe with 3 1/4" aluminum cap marked as noted below, 28" in the ground with a 1" x 1" x 2" fluorescent magnetic module set in the bottom of the monument hole. Bury the original stone as a memorial south.

Aluminum Cap Markings

T13N R67W

S34	S35
1999	

P.L.S. 2927

LARAMIE COUNTY CLERK


1999 JUN 21 AM 9:06

254543

Date of Field Work: April 27, 1999

Office Reference: A.V.I. Job No. 2121

CROSS INDEX DIAGRAM

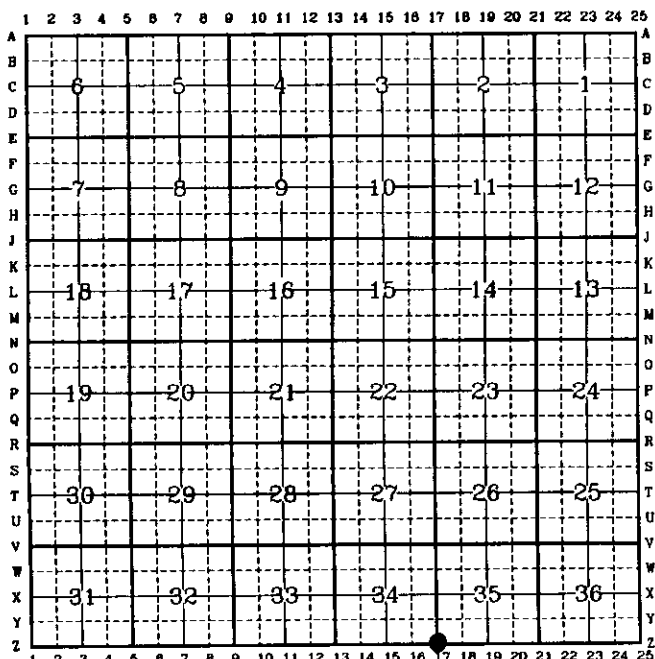

Firm/Agency, Address

Paul A. Reid, P.L.S.
A.V.I., p.c.
2035 Westland Road
Cheyenne, WY 82001

Telephone Number:
(307) 637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name: SE Cor
SBRPEPLS/PLSW: March 1994

Section: 34

T.13N., R.67W.; 6th P.M. Cross-Index No.: Z-17