

CERTIFIED LAND CORNER RECORDATION


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

*Found granite Stone 9" x 9" x 11" - Set near fence corner
2 notches on North side & 4 notches on South side*

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


*Set 5/8" Rebar in fence line - 38.62 feet easterly
Set 5/8" Rebar in fence line - 48.36 feet southerly
Punched dot on top of Stone*

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

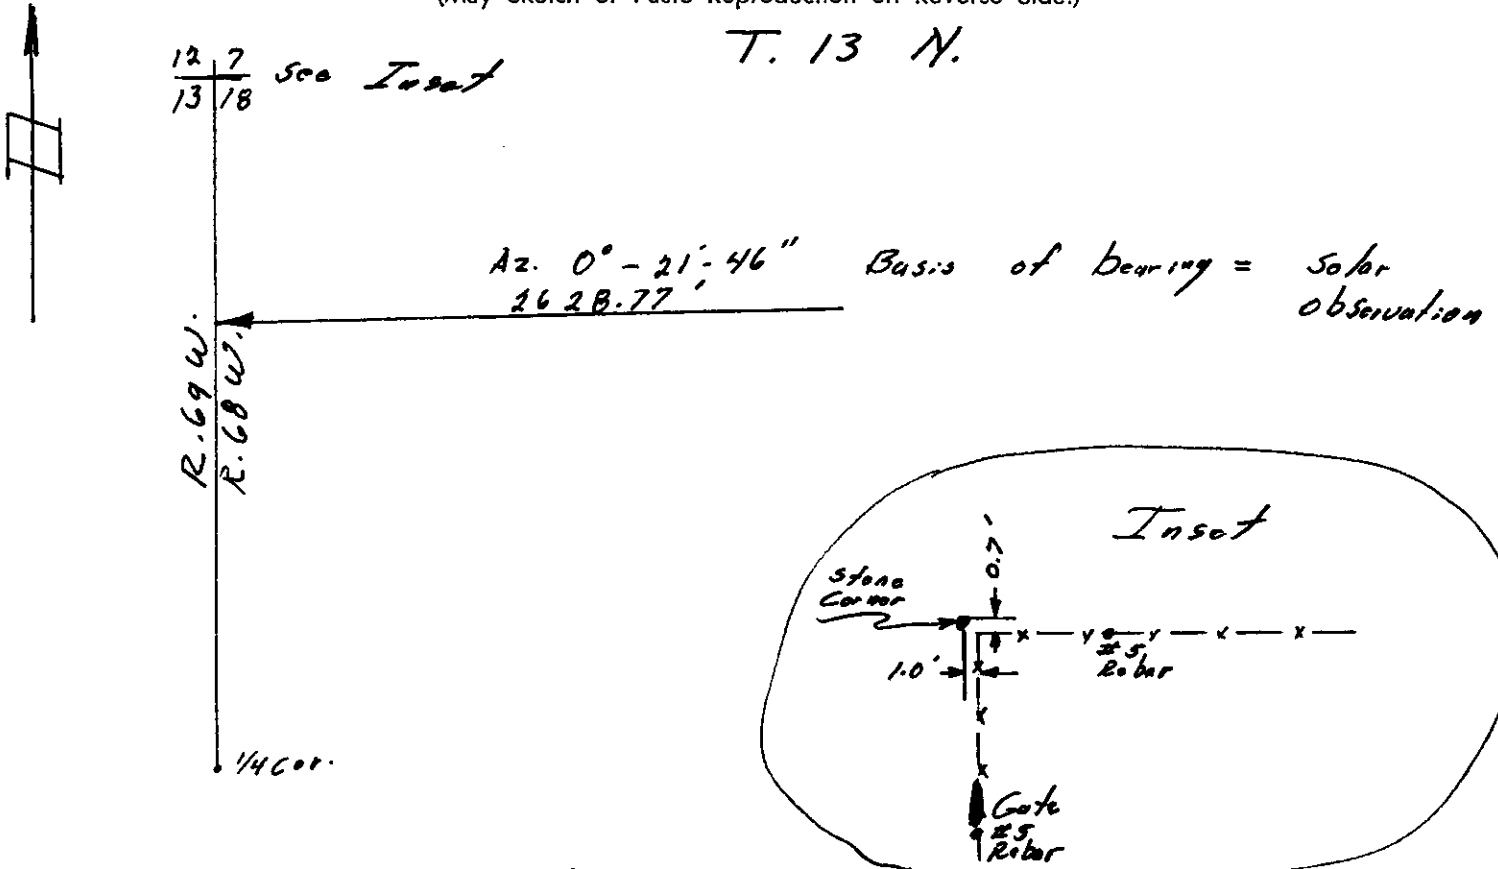

I, Robert C. Corbet certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Robert C. Corbet
Signature of Surveyor

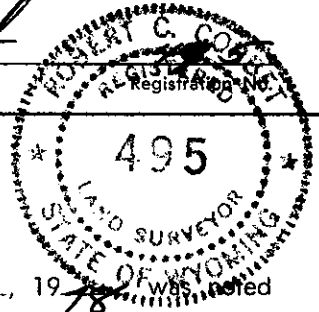

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Saramie

496608

This "corner record" was filed for record on the 22 day of August, 1978, on the cross-index plat and is assigned page No. _____, in book No. _____

Janet C. Whitehead
County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
<u>J-1</u>	T. <u>13</u>	R. <u>68</u>	Mer. _____
<u>J-25</u>	T. <u>13</u>	R. <u>69</u>	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____