

CERTIFIED LAND CORNER RECORDATION


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

LOCATION $\frac{1}{4}$ S. 1 S. 6 T. 13N. R. 69W., R. 68W. 6th P.M.	Found a granite stone, 6" x 7" x 11" with "4" chiseled on face. Stone was found tipped over but apparently not disturbed. Accepted where found as marking the corner position. G.L.O. record - Granite Boulder, 15 x 8 x 5, 1870.
---	---

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Set a 1 $\frac{1}{2}$ " dia. x 30" long iron pipe with brass cap.
 Accessories: ~~None~~ Left stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

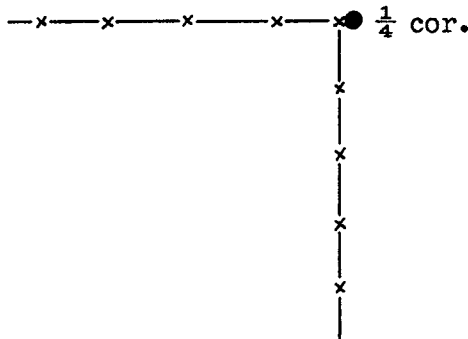

Brass cap set 6" above ground.

Brass cap stamped:
 R. 69W. T. 13N. R. 68W.
 $\frac{1}{4}$
 S. 1 S. 6
 LS 519 1972



R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work at the above described corner as reported on this recordation form and approve the same.

R.L. Hudson
 Signature of Surveyor

Wyoming L.S. No. 519
 Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Saramie

This "corner record" was filed for record on the 13th day of September, 1972, was noted on the cross-index plat and is assigned page No. 13-69, in book No. ONE

John R. Williams
 County Official

Cross Index No. <u>13</u>	T. <u>68</u>	R. <u>6</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Photographed.....

Indexed..... X

Posted..... X

The State of Wyoming }
County of Laramie } SS

This instrument was filed for record
at 1957 o'clock M. on the
..... day of September
A. D. 19..... and duly recorded in
Book on page

John B. Williams

County Clerk & Ex-Officio Register of Deeds
By..... Deputy