

State of Wyoming Corner Record

(In compliance with the **CORNER PERPETUATION AND FILING ACT**, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RECORD:

VA.15°45'E

From corner of sections 10,11,14,15 ran east on random line 40.00 chains. Set stake for temporary 1/4 cor. 79.85 chains intersected east boundary 18 links north of corner to secs. 11,12,13,14. From corner ran N89°52'W on true line same VA. 39.92 chains. Set granite boulder 13x7x6 for 1/4 sec. corner.

AT THE CORNER:

Found Granite Stone with 1/4 chiseled on North side .5'X.9'X.4'

Set two 2" Aluminum caps stamped RP on 5/8" X 24" rebar, 20' north and 20' east.

Stone is approximately 1/4 mi. north of interstate 80

To NW cor sec.14
T13N R69W

N 89°55'27" W
2689.48

20.0'

20.0'

S 89°09'53" E
2640.63

To NE cor sec.14
T13N R69W

300.0'±

Drainage




slope



Date of Field Work: 10/11/07

Office Reference: GRAHAM

Cross Index Plat

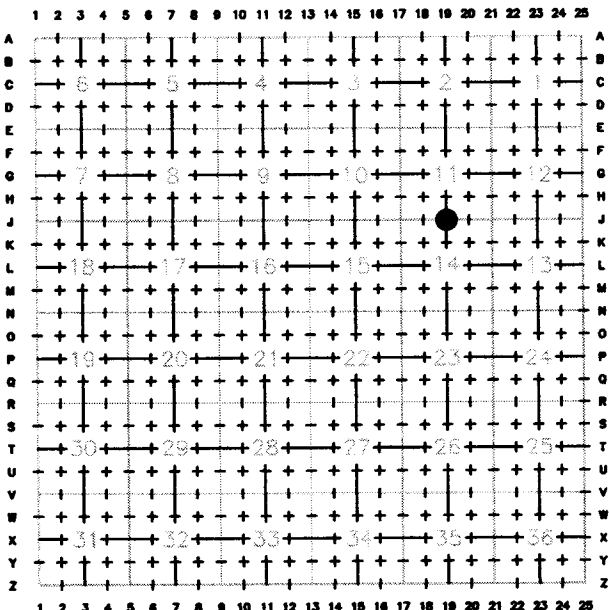

Firm/Agency, Address


Western R&D, Ltd.
5809 Yellowstone Rd., Suite B
Cheyenne, Wyoming 82009

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

Telephone Number: (307) 632-5656

● Found stone, left in place

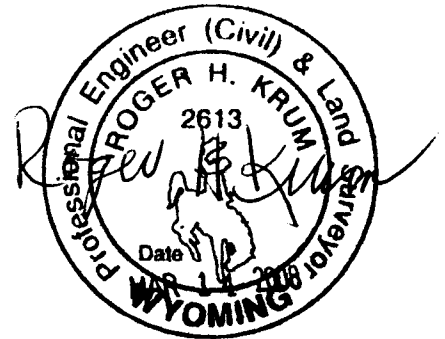

Corner Name North Quarter Corner Section 14, T 13 N, R 69 W, 6th P.M.

Cross-Index No.: J-19

County: Laramie Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998