


State of Wyoming Corner Record


(In compliance with the **CORNER PERPETUATION AND FILING ACT**, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RECORD:
VA.15°47'E
 From corner of sections 11,12,13,14
 ran east on random line 40.00
 chains. Set stake for temporary ¼
 sec.corner. 80.05 chains, intersected
 east boundary 38 links north of
 corner to sec. 12,13 From corner
 ran N 89°44' W on a true line same
 VA. 40.02 chains. Set granite
 boulder 14x12x6 for ¼ sec. corner.



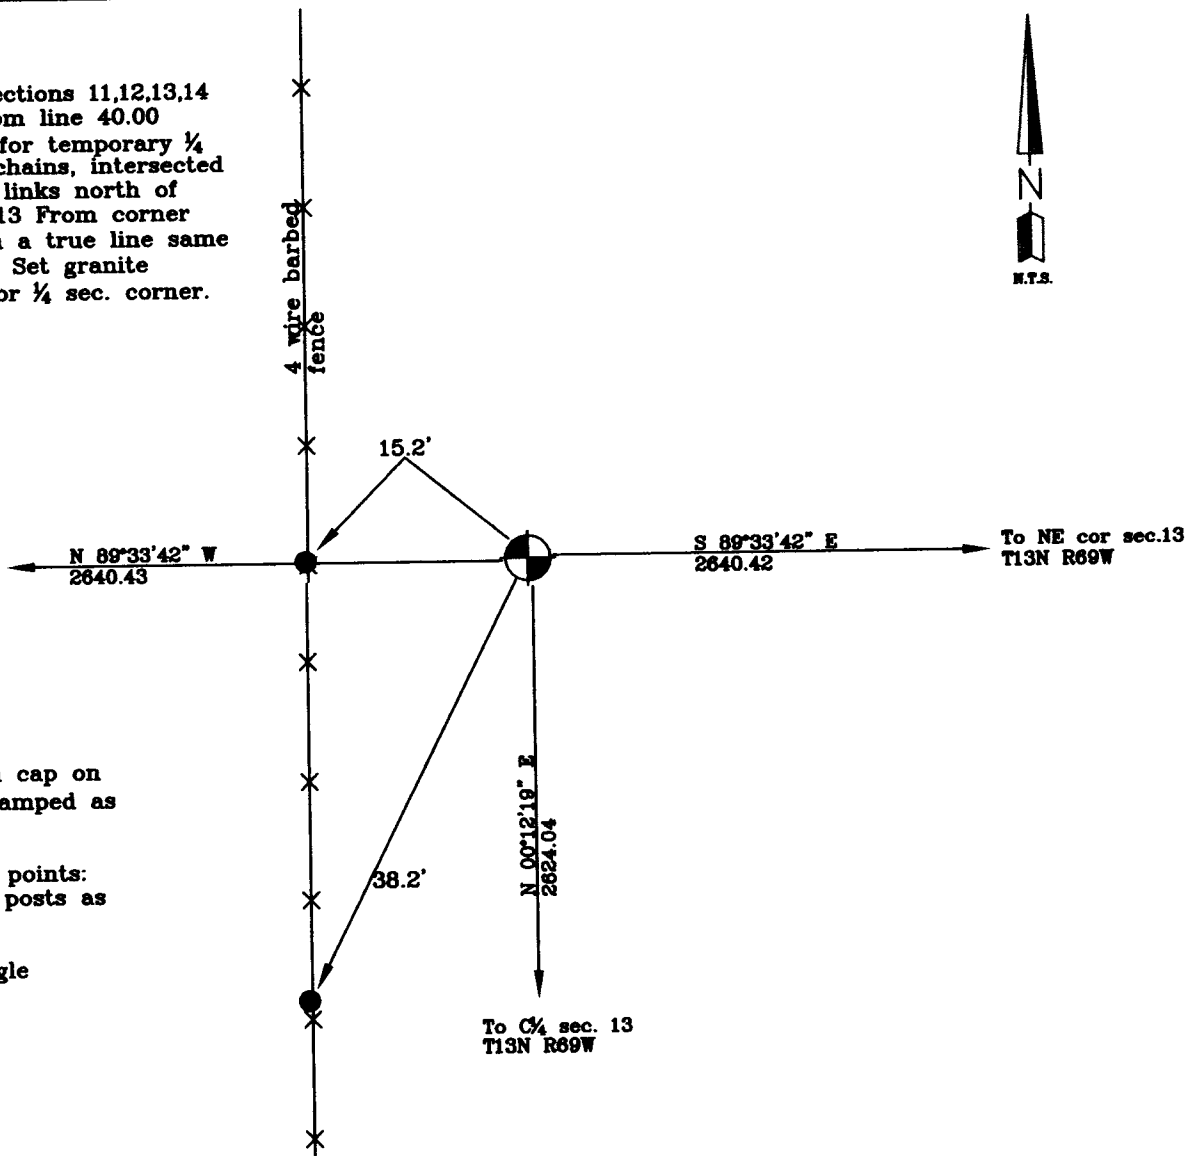

At corner:
 Found nothing
 Set 2.5" aluminum cap on
 5/8" X 24" rebar stamped as
 shown
 Set two reference points:
 PK nails in fence posts as
 shown
 Corner set by single
 proportion

To NW cor sec.13
T13N R69W


To NE cor sec.13
T13N R69W

To ¼ sec. 13
T13N R69W

Date of Field Work: 10/11/07

Office Reference: GRAHAM

Cross Index Plat

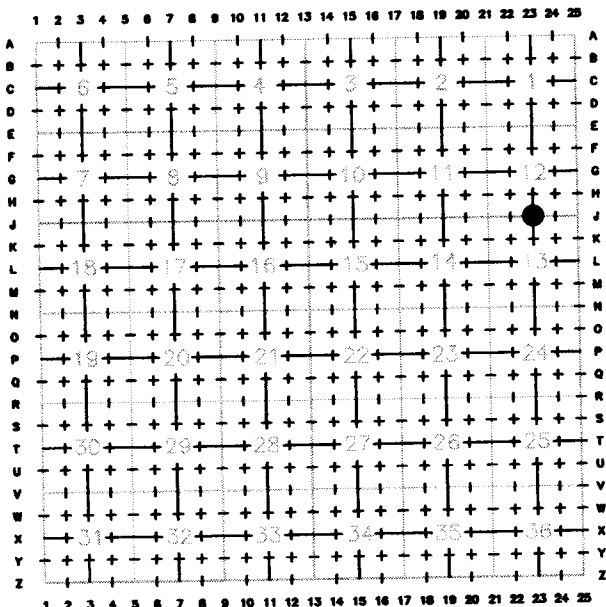

Firm/Agency, Address


Western R&D, Ltd.
 5809 Yellowstone Rd., Suite B
 Cheyenne, Wyoming 82009

This corner record was prepared
 by me or under my direction
 and supervision.

SEAL & SIGNATURE

Telephone Number: (307) 632-5656

● Denotes Monument Set

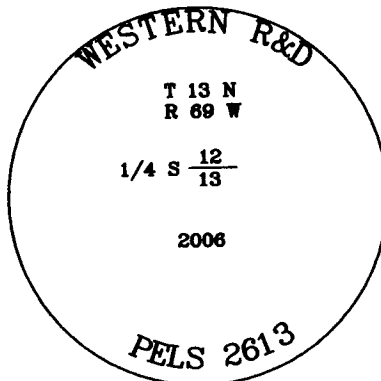

Corner Name North Quarter Corner Section 13, T 13 N, R 69 W, 6th P.M.

Cross-Index No.: J-23

County: Laramie Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998

