

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RECORD:
 VA.15°47'E
 From corner of sections 14,15,22,23 ran east on random line 40.00 chains. Set stake for temporary 1/4 sec. corner. 80.20 chains intersect east boundary 39 links north of sections 13,14,23,24. From corner ran N89°44'W on true line same VA.40.10 chains. Set granite boulder 18x10x8 for 1/4 section corner.

AT THE CORNER:
 Found Granite Stone with 1/4 chiseled on top 1.3' X 1'


Set 3 PK Nails in fence posts

3.5' East of stone
 20.2' East of stone
 18.5' North of stone

Date of Field Work: 9/13/07

Office Reference: GRAHAM

Cross Index Plat

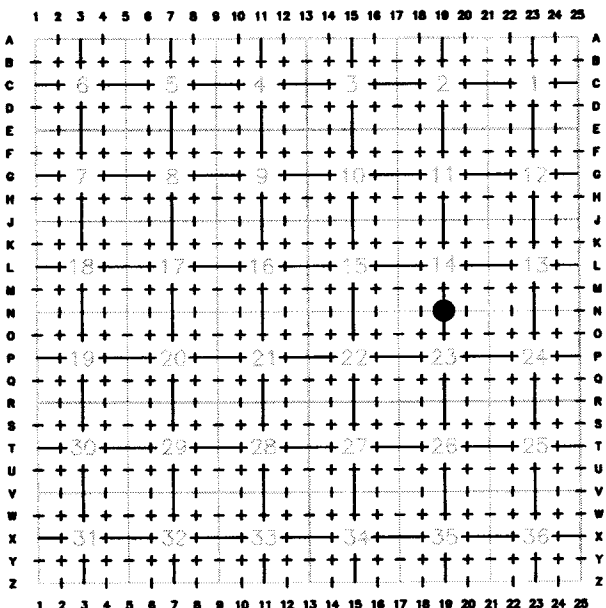

Firm/Agency, Address


Western R&D, Ltd.
 5809 Yellowstone Rd., Suite B
 Cheyenne, Wyoming 82009

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

Telephone Number: (307) 632-5656

● Found stone, left in place

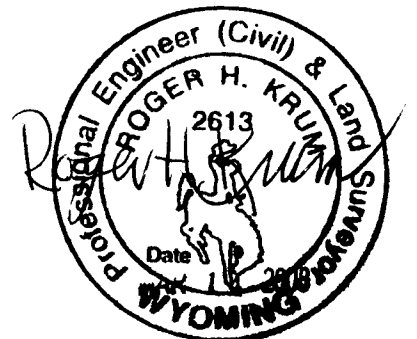

Corner Name North Quarter Corner Section 23, T 13 N, R 69 W, 6th P.M.

Cross-Index No.: N-19

County: Laramie Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998