State of Wyoming Corner Record

(In compliance with the CORNER PERPETIATION AND FILING ACT, Vyoning Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RECORD: NOTHING SET CORNER SET BY SINGLE PROPORTION METHOD

NOTE: ALL TIES ARE PK NAILS SET IN FENCE POSTS AS NOTED

Z-Z-

AT THE CORNER: FOUND NOTHING.

PIACED A 2.5" ALUMINUM CAP ON A 5/8" X 24" REBAR FLUSH WITH THE GROUND STAMPED AS SHOWN.

TO NTO SEC. 24
TISN REGW

N.T.S.

HOUSE

A DIA CEDAR
FENCE POST
GATE

BARBED WIRE FENCE


TO NW/scor sec. 24
TISN REGW

TO EM, sec. 23
TISN REGW

N.T.S.

Date of Field Work: 7/18/06

Office Reference: GRAHAN

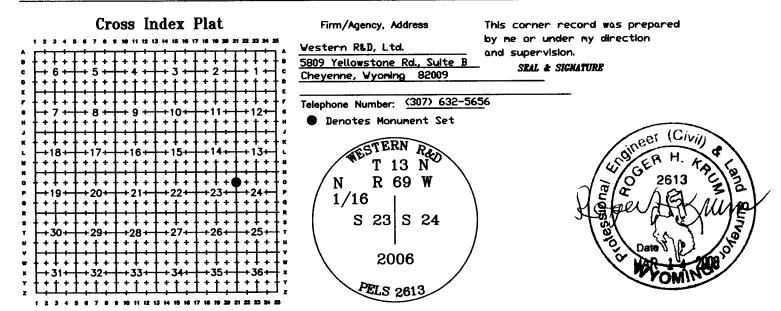

Corner Name NORTH 1/16 CORNER Section 24, T 13 N, R 69 W, 6th P.M.

County: LARAMIE Wyoming
SBRPEPIS/PLSW: March 1994; PLSW January 1998

Cross-Index No.: <u>0-21</u>