## State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36—11—101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)


Reverse side of this form may be used if more space is needed.


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

GLO RECORD: SET GRANITE BOULDER 16" X 8" X 6" FOR 1/4 SECTION CORNER.

MONUMENT FOUND: FOUND GRANITE STONE 15" X 6" X 4" WITH 1/4 ON NORTH FACE.

MONUMENT SET: SET 2 1/4" X 30" ALUMINUM PIPE WITH 3 1/4" ALUMINUM CAP PROJECTING 5" ABOVE GROUND, MARKED AS SHOWN BELOW. BURIED ORIGINAL UPSIDE DOWN NEXT TO MONUMENT.

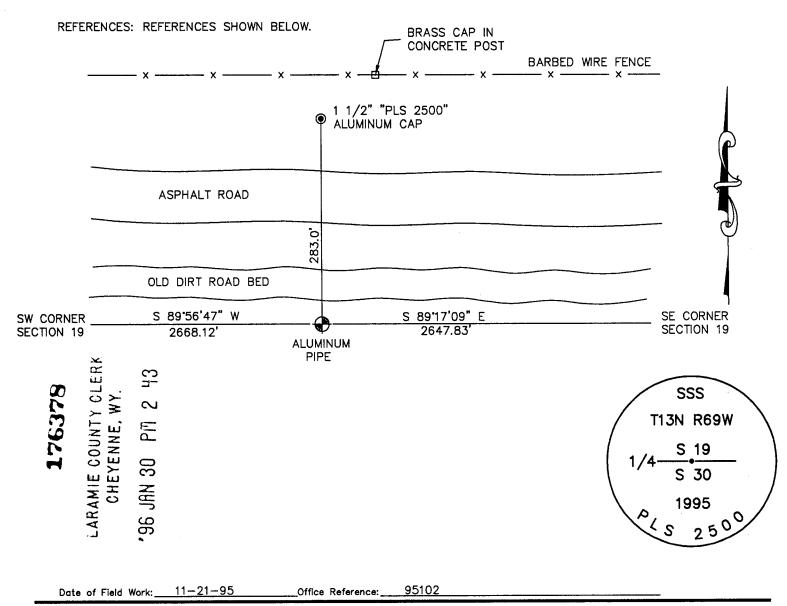



Firm/Agency, Address

STEIL SURVEYING SERVICES, LLC 1102 WEST 19th STREET

CHEYENNE 82001

Telephone Number: <u>(307)</u> 634-7273

prepared by me or under my direction and supervision. SEAL & SIGNATURE

d ssional O M

NORTH 1/4 CORNER

Section: 30 T 13N R 69W; 6th P.M. Cross-Index No.: R-3