## State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33—29—140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RECORD:
VA.15°47'E
From corner of sections 23,24,25+26
ran east on random line 40.00
chains. Set stake for temporary ½
sec. cor. 80.00 chains intersected
east boundary 25 links north of
corner to sections 24+25. From
corner ran N89°49'W on true line
same VA.40.00 chains. Set granite
boulder 18x15x4 for ½ section corner.

Power Line

At the corner:
found nothing
Set 2.5" Alumin
stamped as sho
Monument is a
in RR right of
Corner set by:


Set 2.5" Aluminum cap on %"X 24" rebar stamped as shown.

Set two PK nails in utility poles as shown.

Monument is approx. 64' from N rail of track in RR right of way.


Corner set by single proportion



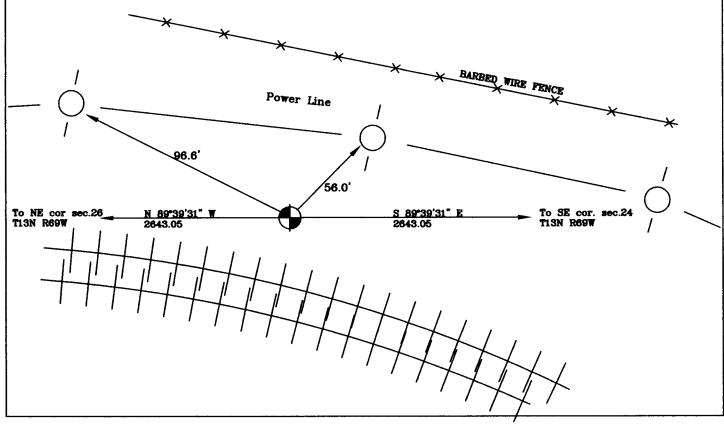

Date of Field Work: 9/7/07

Office Reference: GRAHAM

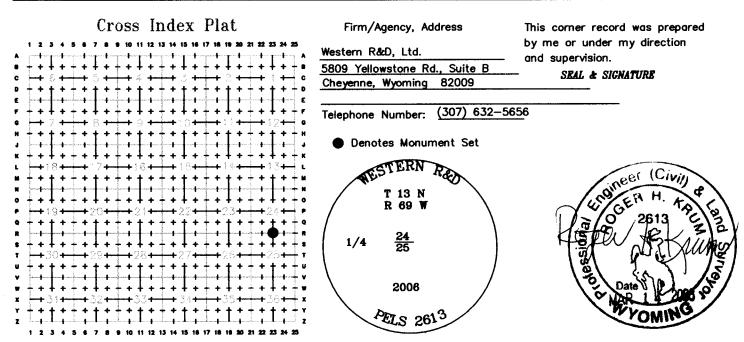

Corner Name South Quarter Corner Section 24, T 13 N, R 69 W, 6th P.M. Cross-Index No.: R-23

County: <u>Laramie</u> Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998