## State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36—11—101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

## Reverse side of this form may be used if more space is needed


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

SET A GRANITE BOULDER 15" X 9" X 5" FOR 1/4 SECTION CORNER.

MONUMENT FOUND: FOUND A 3/4" IRON ROD IN A MOUND OF STONES.

MONUMENT SET: NOTHING SET.

REFERENCES: REFERENCES SHOWN BELOW.

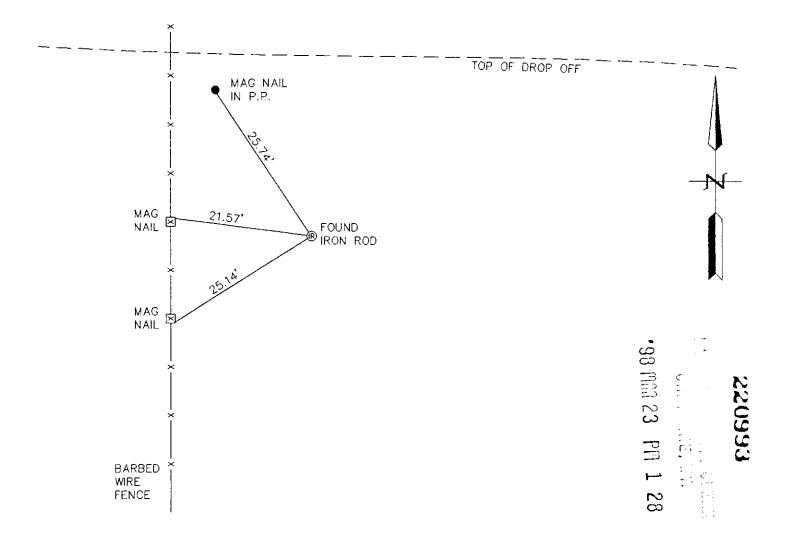

2-27-97 Date of Field Work:

\_Office Reference:

97071 Firm/Agency, Address

INDEX DIAGRAM

STEIL SURVEYING SERVICES,LLC. 1102 WEST 19th STREET

82001 CHEYENNE

Telephone Number: <u>(307)</u> 634-7273

prepared by me or under my direction and supervision.

SEAL & SIGNATURE



0111

WEST 1/4 Corner Name:

Section: 21 T13N R 70W; 6th P.M. Cross-Index No.: P-9