


# Wyoming Certified Land Corner Recordation Certificate

*This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.*

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

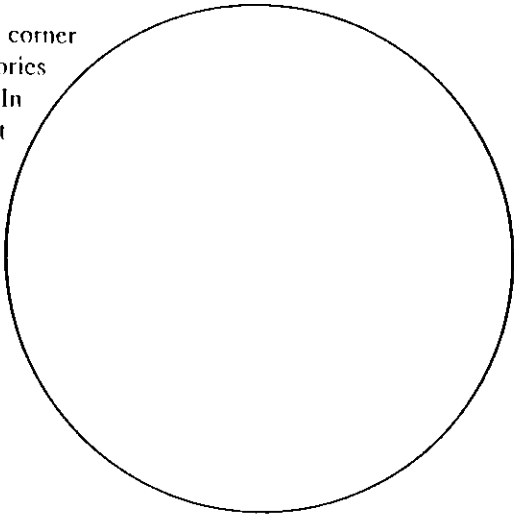


Field Date 3-1-90 Office Reference 90030

G.L.O. Record: granite boulder 18"x 10"x 6".

Found 6"x 8" red granite projecting 0.5' above ground marked "1/4" on west face with 2"x 14" sandstone projecting 0.8' above ground 0.6' south of found stone.

**Monument Inscription**

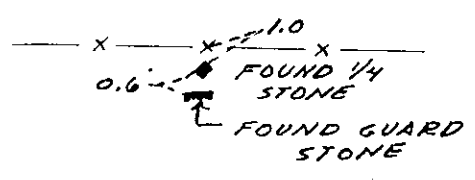

028133  
 RECEIVED  
 LARAMIE COUNTY  
 CHEYENNE, WY.  
 90 MAR 16 PM 1 43

State of Wyoming  
 Office of County Clerk  
 County of Laramie

This Certified Land Corner Recordation Certificate was filed for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19 \_\_\_\_, in Book No. T 13N, R 70W, on Alpha-Numeric coordinates R-3 and was noted on the Cross Index Plat.

\_\_\_\_\_  
 County Clerk

Corner Type:  Aliquot Corner  Other      Section(s) 19,30      Meridian 6th P.M.  
 Corner Name Section      Township 13N      Range 70W      Page \_\_\_\_\_  
 Sheet \_\_\_\_\_ of \_\_\_\_\_

## Directions for using the Cross Index Plat

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

## Cross Index Plat

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B	+																								
C		6				5					4				3					2					
D																									
E																									
F	+																								
G																									
H		7				8					9				10					11					12
J																									
K																									
L																									
M		18				17					16				15					14					13
N																									
O	+																								
P																									
Q																									
R																									
S																									
T																									
U																									
V																									
W	+																								
X																									
Y																									
Z																									

## State Plane Coordinates (optional)

Zone W WC EC E feet/meters

NAD 1927  NGVD 1929  NAD 1983  NAVD 1988

North (Y) = \_\_\_\_\_ East (X) = \_\_\_\_\_ EL = \_\_\_\_\_

Latitude \_\_\_\_\_ Longitude \_\_\_\_\_

Scale Factor \_\_\_\_\_ Geoid Height \_\_\_\_\_

## Certification

I, John A. Steil, Wyoming P.L.S. ~~12~~ 2500 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency Steil Surveying Services  
 Mailing Address P.O. Box 2073  
 Street Address 200 E. 8th Ave.  
 City, State, ZIP Cheyenne, WY. 82003  
 Telephone, FAX 307-634-7273

*John A. Steil*  
 3/12-90

Signature, Seal, and Date

Sheet \_\_\_\_\_ of \_\_\_\_\_