

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

LOCATION

Found # 7 rebar @ fence corner with stone laying loose alongside.
Stone plainly marked with 5 grooves on 1 side and 1 groove on other side.
Accepted # 7 rebar as corner.

30 | 29
31 | 32

T 13 N, R 70 W G.L.O. record - unknown
6th P.M.


DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Left # 7 rebar as found. Set wooden stake @ corner.

Set 1/2" iron rods in fences to east and southwest for witness corners.

Left stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

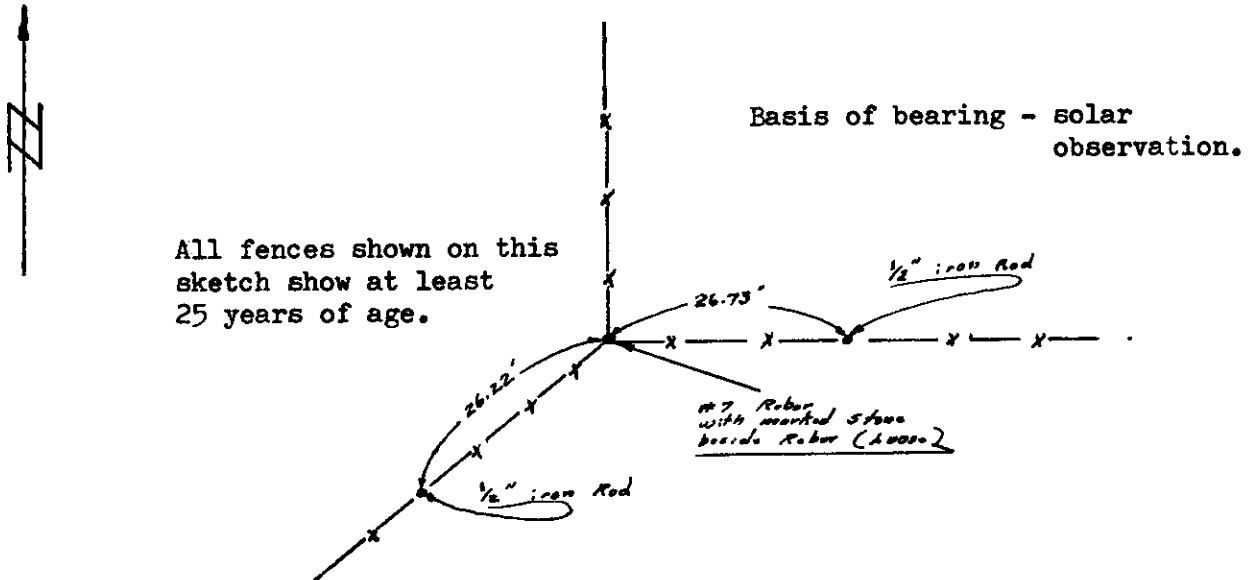

I, Robert C. Corbet certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Robert C. Corbet
Signature of Surveyor

495
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Terrance

This "corner record" was filed for record on the 6 day of January, 1975, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

James C. Whitehead
County Official

Cross Index No. V-5 T. 13 R. 70 6 Mer.
____ T. _____ R. _____ Mer.
____ T. _____ R. _____ Mer.
____ T. _____ R. _____ Mer.
____ T. _____ R. _____ Mer.
____ T. _____ R. _____ Mer.
____ T. _____ R. _____ Mer.

Photographed
 Indexed
 Posted
 Assessor

The State of Wyoming }
 County of Laramie }

This instrument was filed for record
 at 125 o'clock P. M. on the
6 day of January
 A. D. 19 75 and duly recorded in
 Book _____ on page _____

James C. Mitchell
 County Clerk & Ex-Officio Register of Deeds
 By [Signature] Deputy