

135962
RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

CERTIFIED LAND CORNER RECORDATION

'94 FEB 9 PM 8 47

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

ORIGINAL G.L.O. RECORD: J. WESLEY HAMMOND, U.S. DEPUTY SURVEYOR, AUGUST 19, 1871

Chs.
40.00 SET SANDSTONE 16X7X5 FOR 1/4 SEC. COR.


LARAMIE COUNTY ROAD RECORDS: SURVEY OF EXT. C.R. # 2-78 PAGES 9 & 10 BOOK NO. UNKNOWN 12-23-93

2640' E 1/4 COR. 11-13-62 FOUND STONE BURIED SAME 1' DEEP
FOUND: LATITUDINAL FENCE POST (R.R. TIE) 30' EAST. SET "W.C.L.R." STAKES 40' E/W

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


SET: @ 10.00' WEST OF THE TRUE CORNER POINT, WHICH IS ALSO IN THE EXISTING ROAD CENTERLINE OF COUNTY ROAD NO. 153, I SET A NO. 5X24" REBAR WITH 2" AL. CAP DOWN 0.7'. CORNER MONUMENT WILL BE RESET AT A LATER DATE AND NEW C.L.C.R. FILED.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)

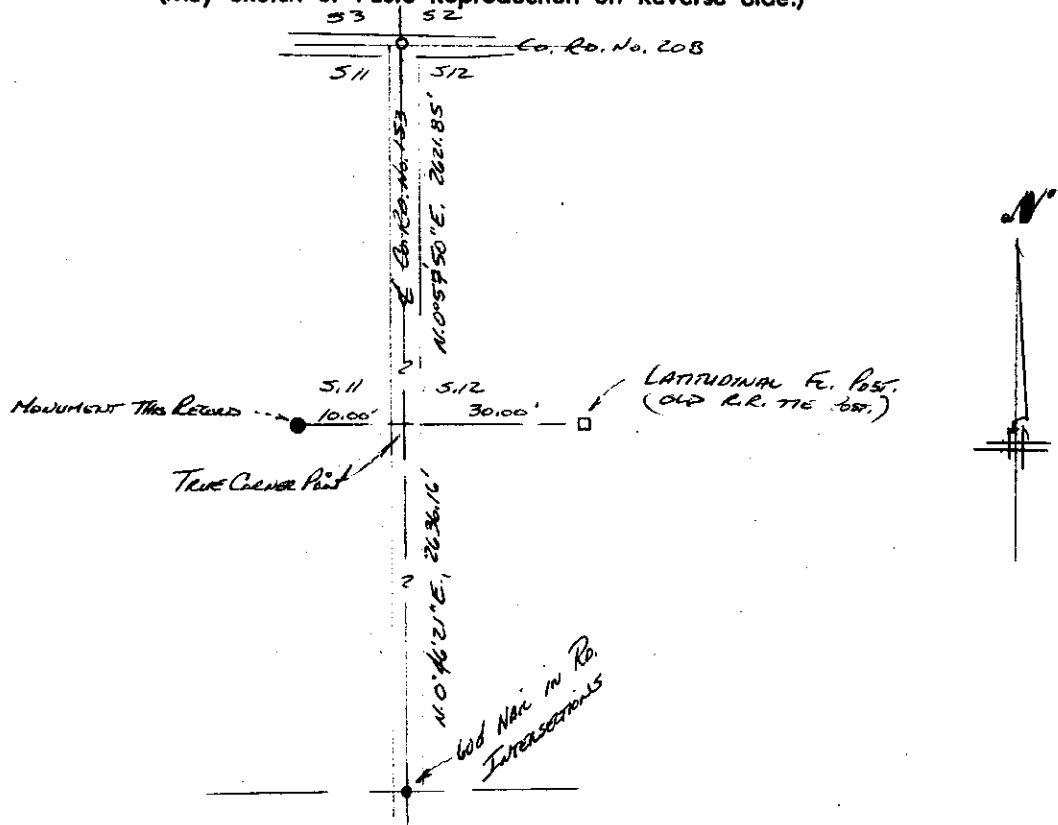

I, Paul A. Reid certify that I have carefully performed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Signature of Surveyor

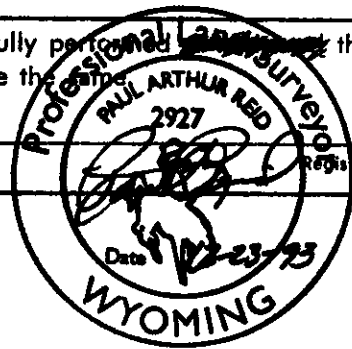

STATE OF WYOMING,
Office of Clerk and Recorder,
County of _____

This "corner record" was filed for record on the _____ day of _____, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____

T.13N. R.62W

5.11 | 5.12

County Official			
Cross Index No. <u>G-21</u>	T. <u>13N.</u>	R. <u>62W. 63E.</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.