

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)


LOCATION
S.31 | S.32
 T.13N., R.62W.
 6th P.M.

Found (G.L.O.) 2½" dia., concrete-filled iron pipe, 30" below road surface.
 No brass cap on iron pipe.
 G.L.O. record - Iron post, 3 ft. long, 3 ins. dia., 2½ ft. in the ground with brass cap. 1911

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Corner not remonumented.
 Accessories: None

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

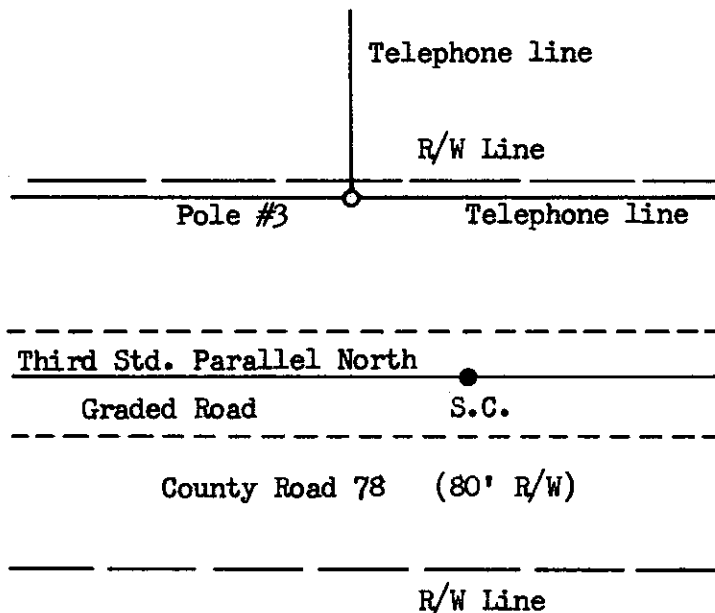

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson
 Signature of Surveyor

Wyoming L.S. No. 519
 Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Laramie

This "corner record" was filed for record on the 9th day of November, 1972, was noted on the cross-index plat and is assigned page No. 13-62, in book No. 99E.

Jolly B. Williams
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming }
County of Laramie }

This instrument was filed for record
at 1:05 o'clock P. M. on the
25th day of November
A. D. 1922 and duly recorded in
Book on page

John B. Williamson

County Clerk & Ex-Officio Register of Deeds
By _____, Deputy