

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

LOCATION

Found 6" x 8" x 14" white sandstone with "1/4" chiseled on face.

1/4 S. 7
S. 18


G.L.O. record - Contract survey by J.W. Hammond in 1871 - "Set Limestone 16 x 9 x 5 for 1/4 sec. cor. . . ."

T.14N.,R.61W.
6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set 1 1/2" dia. x 30" long iron pipe with brass cap for corner monument.
Left stone as memorial.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

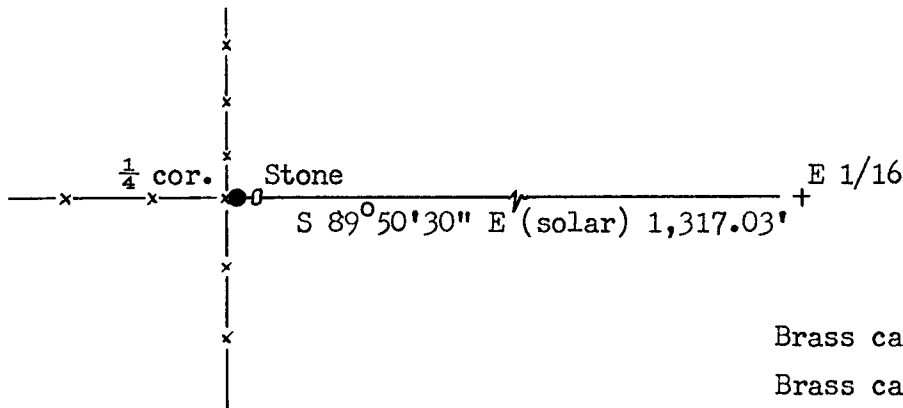

Brass cap set 6" above surface. 1"=20'

Brass cap stamped:

T.14N. R.61W.

1/4 S. 7
S. 18

LS 519 1972

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson
Signature of Surveyor

Wyoming L.S. No. 519
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Laramie

This "corner record" was filed for record on the 12th day of June, 1972, was noted on the cross-index plat and is assigned page No. 14-61, in book No. 14-61

John B. Hillman JW
County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming }
County of Laramie } SS

This instrument was filed for record
at 4:25 o'clock P. M. on the
12th day of June
A. D. 19 22 and duly recorded in
Book on page

John B. Williams

County Clerk & Ex-Officio Register of Deeds
By _____, Deputy