RECEIVED

LARAMIE DOTHUE

CHEYER ... TI

CERTIFIED LAND CORNER RECORDATION

'87 AUG 28 AM 9 07

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

T.14N. 114 24 19

R. 62 W. R. 61 W.

FOUND! IRON SPIKE FIRMLY SET O.1 FEET BELOW

ROAD SURFACE.

SET! USEV 18" INNO BERRES


SET! YE" XIS" LONG REBAR WITH ASUMINUM CAP

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

SEE TIES BELOW

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.

(May Sketch or Paste Reproduction on Reverse Side.)

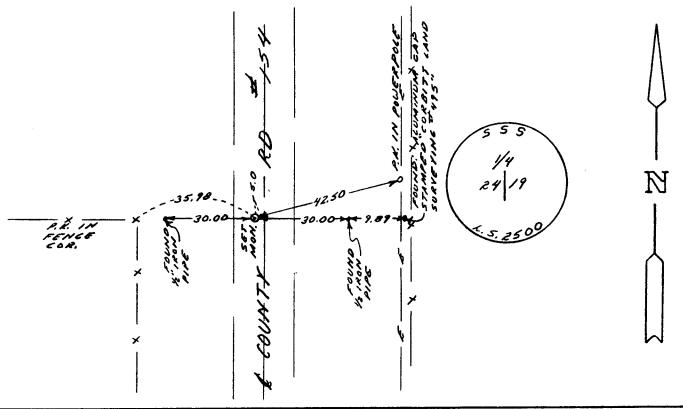

l,	JOHN A. 57516	certify that I have carefully perfor	med or reviewed the work
done on the diagrammed corner as reported on this recordation form and approve the same.			
			Registration No.
		Signature of Surveyor	registration No.
STATE OF WYON	MING,		
Office of Clerk a			
County of	anie		

This "corner record" was filed for record on the day on the cross-index plat and is assigned page No._____, in

19. No. 19. 1. 19. No. 19. No.

P-1 14-61 P-25 14-62

BOOK 1250