

**CERTIFIED LAND CORNER RECORDATION**


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

LOCATION Found a 1/2" dia. x 18" long iron pipe.  
 C 1/4 Iron pipe set by Wyoming P.E. & L.S. No. 638 in 1970 as protracted  
 S.30 center-of-section.  
 T.14N., R.61W.  
 6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
 TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Replaced pipe with a 1 1/2" dia. x 30" long galvanized iron pipe with  
 brass cap.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.  
 (May Sketch or Paste Reproduction on Reverse Side.)

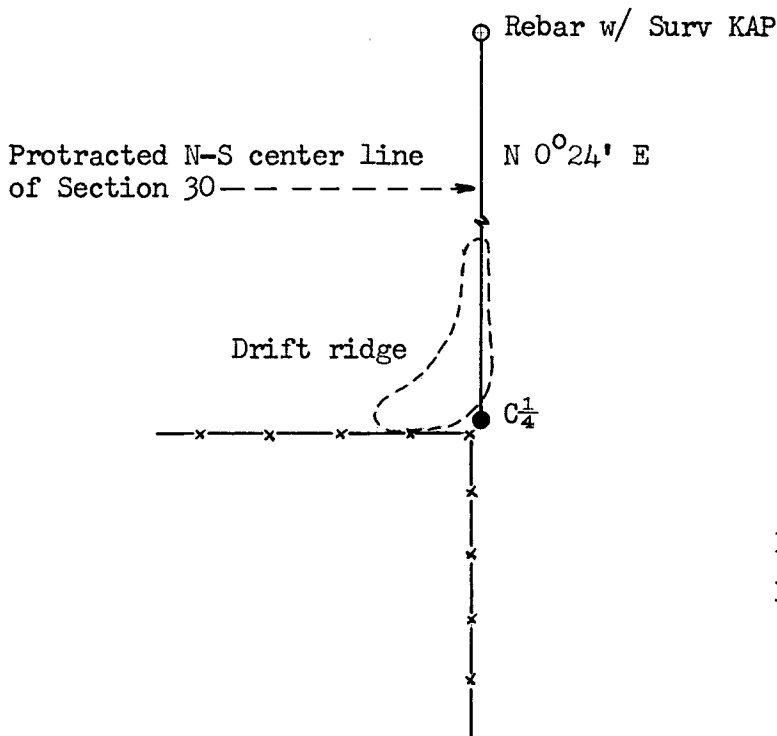

Brass cap set 6" above surface.  
 Brass cap stamped:  
 PROTRACTED  
 C 1/4 S. 30  
 LS 519 1972

I, R.L. Hudson certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson Wyoming L.S. No. 519  
 Signature of Surveyor Registration No.

STATE OF WYOMING,  
 Office of Clerk and Recorder,  
 County of Darwinie

This "corner record" was filed for record on the 31st day of July, 1972, was noted on the cross-index plat and is assigned page No. 14-61, in book No. ONE.

John B. Hillman HW  
 County Official

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming }  
County of Laramie } SS

This instrument was filed for record  
at 10:15 o'clock P.M. on the  
31 day of July  
A. D. 19 22 and duly recorded in  
Book \_\_\_\_\_ on page \_\_\_\_\_

*John A. McMillan*

County Clerk & Ex-Officio Registrar of Deeds  
Deputy