

**CERTIFIED LAND CORNER RECORDATION**

LOCATION  
 1/4 S.9 | S. 10  
 T.14N., R.63W.  
 6th P.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)  
 Found 8" x 8" x 12" granite stone set with 1/4 marked on west side.  
 G.L.O. record - unknown.


DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
 TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Cheisled "X" on top of stone.  
 Accessories: Set 5/2' steel post 1 ft. east of stone.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.

(May Sketch or Paste Reproduction on Reverse Side.)

Note: Basis of bearing - solar observation 1/4 Cor.

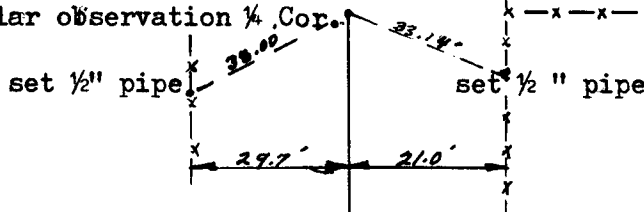

28 27  
 33 34

I, Robert C. Corbet certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Robert C. Corbet L. S. No. 495  
 Signature of Surveyor Registration No.

STATE OF WYOMING,  
 Office of Clerk and Recorder,  
 County of Laramie

This "corner record" was filed for record on the 9 day of August, 1973, was noted on the cross-index plat and is assigned page No. \_\_\_\_\_, in book No. \_\_\_\_\_.

John B. Husiman  
 County Official

Cross Index No. <u>G-13</u>	T. <u>14</u>	R. <u>63</u>	<u>6</u> Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Photographed

Indexed

Posted

Assessor

The State of Wyoming }  
County of Teton } SS

This instrument was filed for record  
at 1:14 o'clock P. M. on the  
9 day of August  
A. D. 1923 and duly recorded in  
Book \_\_\_\_\_ on page \_\_\_\_\_

*Walter B. Williams*

\_\_\_\_\_  
Deputy Register of Deeds  
Deputy