State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)


Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.


U.S.G.L.O. 1871 Record: Set a sand stone 16x12x4 for quarter corner.

No evidence of monument or accessories found. Corner is lost.

Establish corner position by single proportion from the double proportioned and set monuments (LS 6098) for the southeast and southwest corners of Section 9.

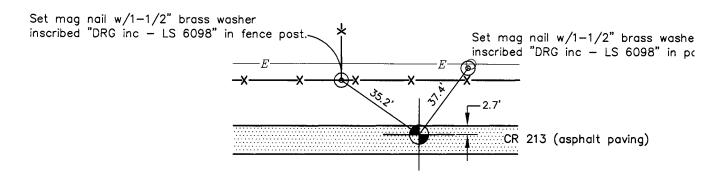


Monument location



WYO. SPC EAST GRID NORTH

Set 2-1/2" Aluminum Cap on a 30" no. 6 rebar flush with asphalt pavement, inscribed as shown below.




Monument Inscripition

Date of Field Work: 6/9/11

Office Reference: 18655

Cross Index Plat



Firm/Agency, Address

RONALD C. RENNKE D. R. GRIFFIN & ASSOCIATES 1414 ELK STREET ROCK SPRINGS, WYOMING 82901

Telephone Number: (307) 362-5028

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



RECORDED 8/09/2011 AT 10:15 AM REC# 573768 BK# 2231 PG# 452 DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF

Corner Name South 1/4 Corner Section 8, T 14 N, R 63 W, 6th P.M.

County: Laramie, Wyoming

Cross-Index No.: J-7

SBRPEPLS/PLSW: March 1994; PLSW January 1998