

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

LOCATION

$\frac{30}{\frac{1}{4} 31}$

Found 8" x 6" x 12" granite stone in place with $\frac{1}{4}$ on North side.


T.14N., R.63W.
6th P.M.

G. L. O. record - unknown.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set lath and stake at corner.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

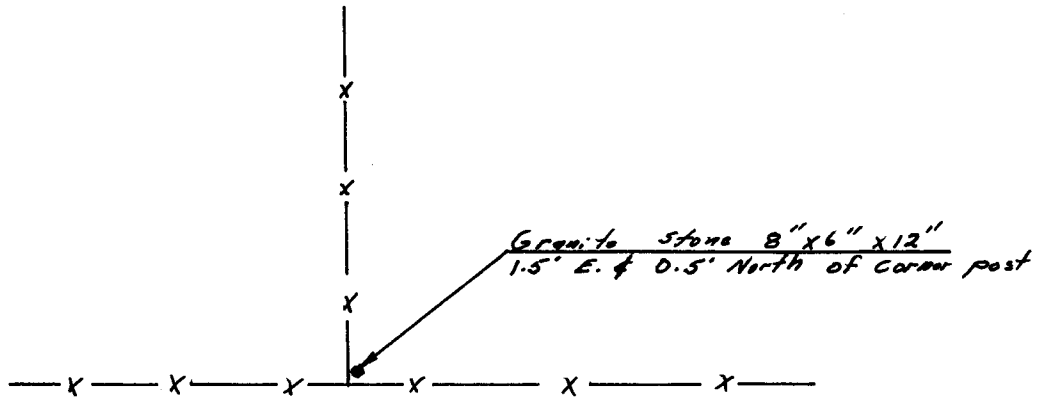

I, Robert C. Corbet certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Robert C. Corbet
Signature of Surveyor

L. S. No. 495
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of Saramie

This "corner record" was filed for record on the 9 day of August, 19 73, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

John B. Huiman
County Official

Cross Index No. <u>13</u>	T. <u>14</u>	R. <u>63</u>	<u>6</u> Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Photographed

Indexed

Posted

Assessor _____

The State of Wyoming }
County of Laramie } ss

This instrument was filed for record
at _____ of _____ M. on the

A. D. 19 25 and duly recorded in

Book _____ on page _____

John B. Williams

County Clerk & Deput Office Register of Deeds
Deputy