State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1977, Section 36-11-101, et, seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

GLO North on Random line between Sec. 3 and Sec. 2 - 9.5 chains cross Wagon Road bears E & W - 40 chains set temp 1/4 - 79.91 chains intersect North boundary 95 links West of section corner thence, 80°38'W on a true line 39.91 chains, set 14"x7"x5" granite boulder (1870)

Found granite boulder 14"x7"x5" with 1/4 carved thereon perpetuated by rebar with al. cap placed on North side of stone.

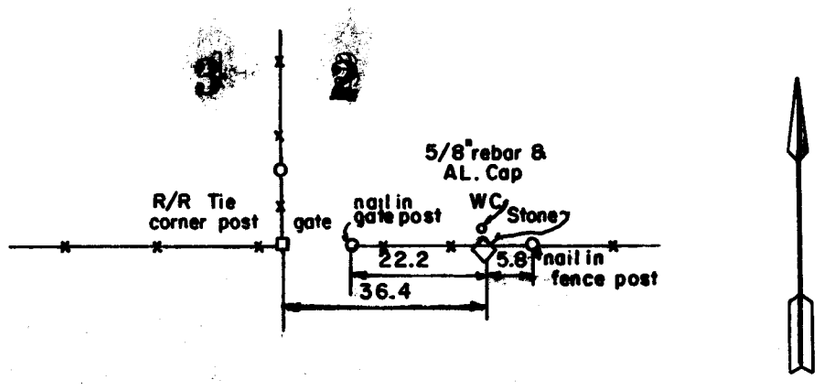

160351
RECEIVING
LARAMIE COUNTY CLERK
CHEYENNE, WY
1995 APR 10 AM 9:08

Date of Field Work: 1 April 1995 Office Reference:

CROSS INDEX DIAGRAM

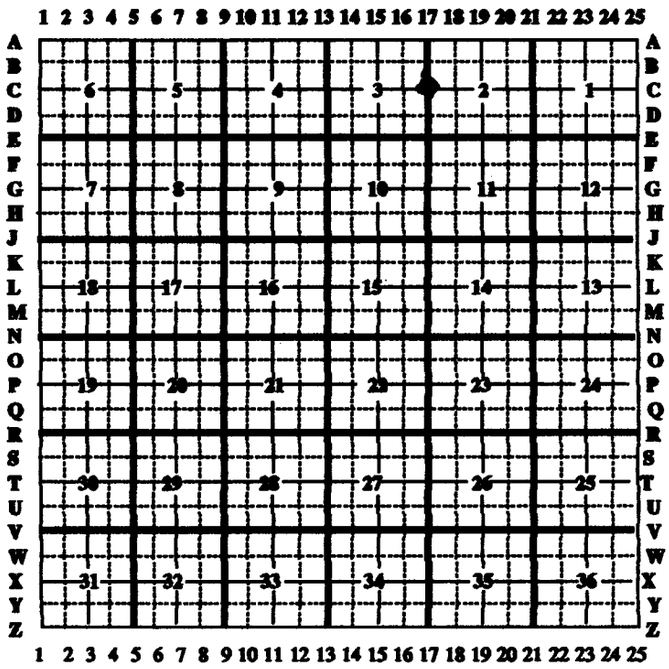

Firm/Agency, Address

Terrestrial Surveying & Mapping

P. O. Box 82

Cheyenne, Wy 82003

Telephone Number: 634-9360

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

Professional Land Surveyor
Larry T. Perry
3047
Date 6 Jan 95
WYOMING

Corner Name: 1/4 Section: 3/2 T14 N R65W : 6th P.M. Cross-Index No.: C-17