State of Wyoming Corner Record


(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et, seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

GLO North between Sec. 9 and Sec. 10 - 62 chains to old Wagon Road run East & West - 80 chains set Granite Bounder 18"x10"x7" for corner of Sec. 3,4,9 & 10).

Found granite boulder 18"x10"x7" in fence corner as shorn hereon 5 well defined hash marks on the South and 3 well defined hash marks on the East. Said corner may have been disturbed but upon double proportioning in a point as per GLO instructions, said stone appears to be reasonably close to the original location and I could not dispute said location with any certainty. Set rebar and Al. cap as W. C.

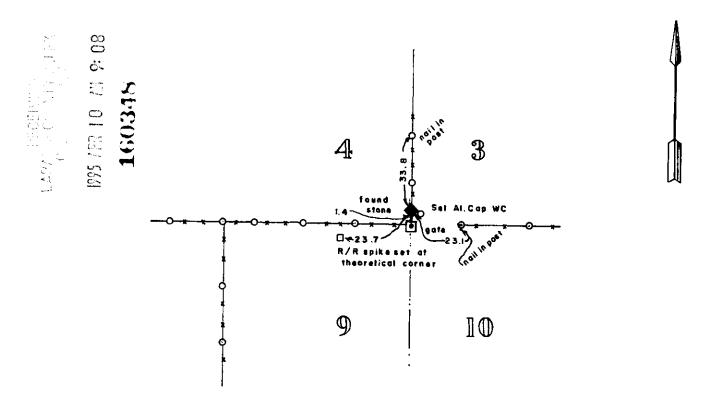

Date of Field Work: ___1 April 1995____ ___Office Reference:_

CROSS INDEX DIAGRAM

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 C C D D E E F G G H H J K K L L M M N N O O P Q 0 R R S T U ٧ W W X ¥ 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25

Firm/Agency, Address

Terrestrial Surveying & Mapping

P. O. Box 82

Chevenne, Wv 82003

Telephone Number: 634-9360

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



1658

4 3 Corner Name: 9 10 Section:

T14 N R65W: 6th P.M. Cross-Index No.: E-13