

# State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.


Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

**RECORD:** GLO RECORD UNKNOWN.

**MONUMENT FOUND:** FOUND NOTHING.

**MONUMENT SET:** SET A 5/8" X 24" REBAR WITH A 2 1/2" ALUMINUM CAP PROJECTING 0.4' ABOVE GROUND SURFACE WITH THE CAP STAMPED AS SHOWN BELOW. MONUMENT WAS SET BY SINGLE PROPORTION MEASUREMENTS.

**REFERENCES:** MONUMENT LIES 19' SOUTH OF A E-W BARBED WIRE FENCE AND 37' EAST OF A N-S BARBED WIRE FENCE. SET P.K.'S IN WOOD POST FOR REFERENCES.

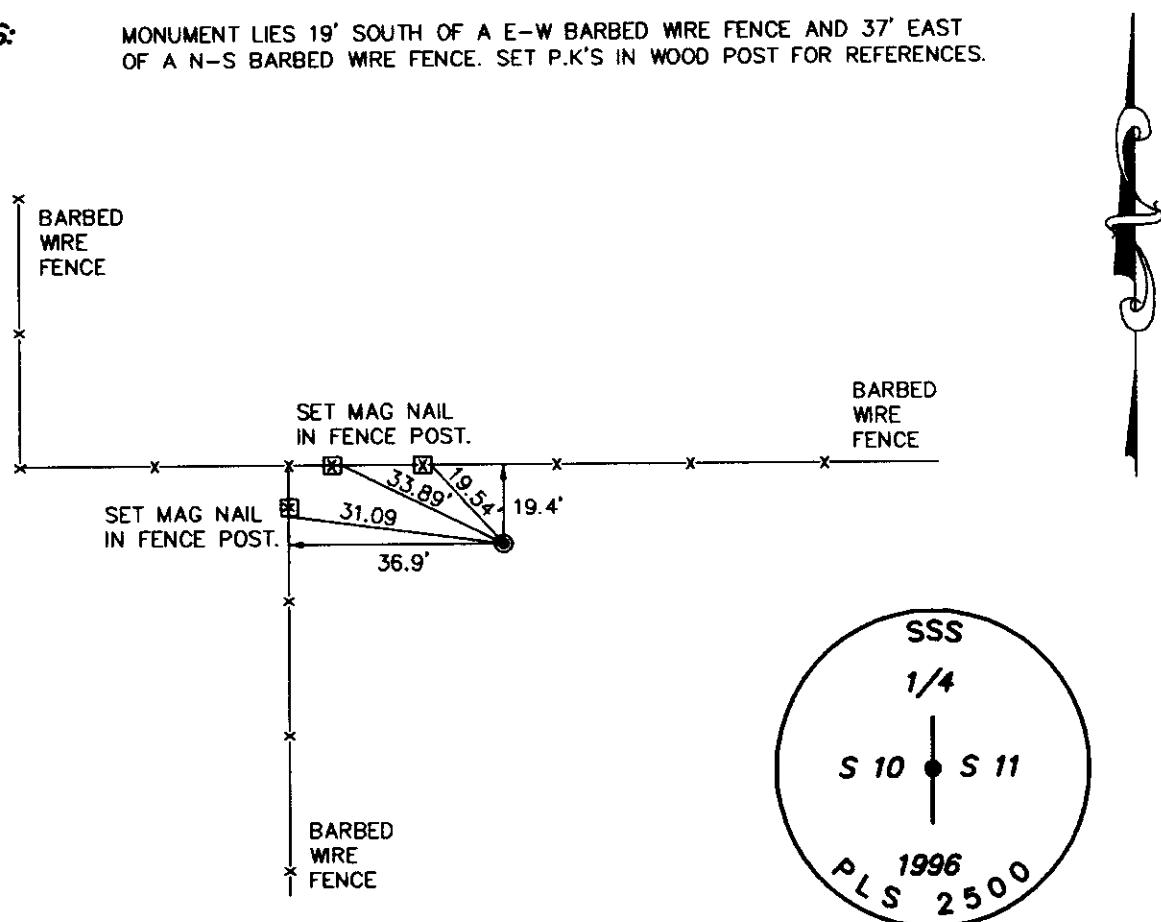


Date of Field Work: 8/12/96

Office Reference: 96114

## Monument Inscription

### Cross Index Plat

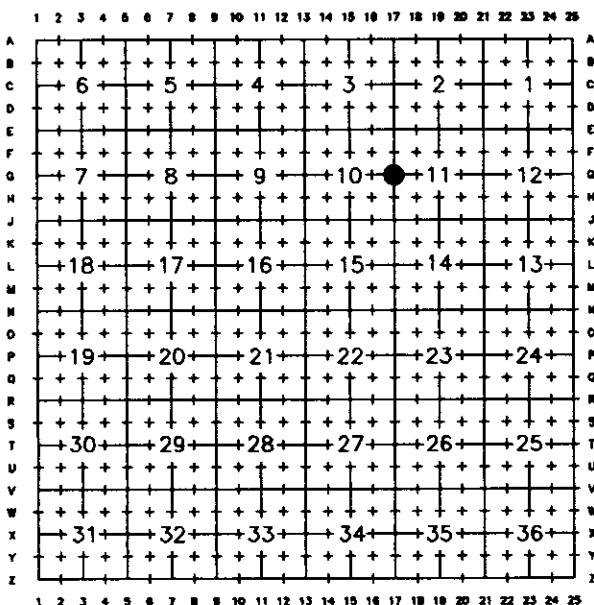


Firm/Agency, Address

STEIL SURVEYING SERVICES LLC  
1102 WEST 19th STREET  
CHEYENNE WY 82001

Telephone Number: (307) 634-7273

This corner record was prepared  
by me or under my direction  
and supervision.

### SEAL & SIGNATURE

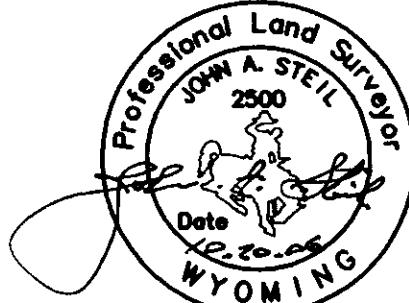

Corner Name WEST 1/4 Section 11, T 14 N, R 65 W, 6th P.M.

Cross-Index No.: G-17

County: LARAMIE Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998