## **CERTIFIED LAND CORNER RECORDATION**

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

LOCATION

W 1/16 S•11 1. Corner established by this survey.


S.14 T.14N., R.65W. 6th P.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

- 1. Corner falls in Union Pacific Railroad R/W.
- 2. Set 5/8" dia. x 24" long rebar with Surv KAP for corner.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.

(May Sketch or Paste Reproduction on Reverse Side.)

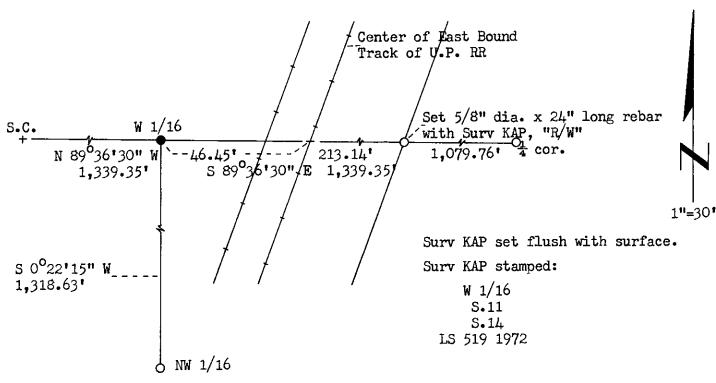

	1972	
∂ NW 1/16		
i, R.L. Hudson		performed <del>or reviewed</del> the work
done on the diagrammed corner as reported on this reco	ordation form and approve th	e same.
	R.L. Kudson	Wyoming L.S. No. 519
	Signature of Surveyor	Registration No.
STATE OF WYOMING,		
Office of Clerk and Recorder,		
County of Lasame		
This "corner record" was filed for record on the 23.2 da on the cross-index plat and is assigned page No. 14-65	y of May, , in book No. JAKE	19_72, was noted
	Co	ounty Official
	Cross Index No	. T R Mer.
		T R Mer.
		T R Mer.
	<del></del>	. T R Mer.
	<del></del>	. T R Mer. _ T R Mer.
		T R Mer.
- 10 1d	-1.5	

By Com	Thus at	
ity Cl	This in This i	
County Clerk & Ex-Officio Register of Deeds  By Deputy	This instrument was at 3.07 o'clock  The D. 19 72 an book on p. 19 72 an o'clock	
Ex-O	1/20 De la maria	
fficio	at was filed for o'clock \( \sum_{\text{M}} \) and duty recording to a page	
Rega		
- 6 - E	was filed for record school Dia.  and thely recorded in  on page	
ot Deeds	for record M. on the	
4 E	To I Ba	